

**BEST AVAILABLE COPY**



4552  
09/373 980



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*H. Behen*

Dated

6 January 2004

Patents Form 1/77  
Patents Act 1977  
(Rule 16)



18FEB97 E254482-1 D02917  
P01/7700 25:00

## Request for grant of a patent

The Patent Office  
Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference

5219602/JJG

17 FEB 1997

2. Patent Application Number

**9703216.3**

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

Communication & Control Electronics Limited  
Stirling House  
Stirling Road  
The Surrey Research Park  
Guildford, Surrey GU2 5RF  
6791636002  
Patents ADP number (*if known*)

If the applicant is a corporate body, give the  
country/state of its incorporation

Country: ENGLAND  
State:

4. Title of the invention

LOCAL COMMUNICATION SYSTEM

5. Name of agent

"Address for Service" in the United Kingdom  
to which all correspondence should be sent

Beresford & Co

2/5 Warwick Court  
High Holborn  
London WC1R 5DJ

1826001

Fitzpatrick  
4 West Regent Street  
Glasgow  
G2 9RS

Patents ADP number

6. Priority details

Country

GB

Priority application number

9622922.4

Date of filing

4 NOVEMBER 1996

## Patents Form 1/77

7. If this application is divided or otherwise derived from an earlier UK application give details

Number of earlier of application

Date of filing

8. Is a statement of inventorship and or right to grant of a patent required in support of this request?

YES

9. Enter the number of sheets for any of the following items you are filing with this form.

0 Continuation sheets of this form

47 Description

3 Claim(s)

0 Abstract

0 Drawing(s)



10. If you are also filing any of the following, state how many against each item.

0 Priority documents

0 Translations of priority documents

0 Statement of inventorship and right to grant of a patent (*Patents form 7/77*)

0 Request for preliminary examination and search (*Patents Form 9/77*)

0 Request for Substantive Examination (*Patents Form 10/77*)

11. I/We request the grant of a patent on the basis of this application

Signature

  
BERESFORD & Co

Date 17 February 1997

12. Name and daytime telephone number of person to contact in the United Kingdom

JOHN JAMES GRAY

Tel: 0171-831-2290

## LOCAL COMMUNICATION SYSTEM

A local communication system which combines source data (CD audio, MPEG video, telephone audio etc) with control commands in a low cost fibre network is available in the form of D2B Optical. For details, see for example the "Conan Technology Brochure" and the "Conan IC Data Sheet" available from Communication & Control Electronics Limited, Stirling House, Stirling Road, The Surrey Research Park, Guildford, Surrey GU2 5RF. An extract from the CONAN IC Data Sheet is attached hereto as an Appendix. See also German patent applications of Becker GmbH with filing numbers 19503206.3 (95P03), 19503207.1 (95P04), 19503209.8 (95P05), 19503210.1 (95P06), 19503212.8 (95P07), 19503213.6 (95P08), 19503214.4 (95P09) and 19503215.2 (95P10). "Conan" is a registered trade mark of Communication & Control Electronics Limited.

The present invention aims to enable expansion of the capacity of such a network, for use in vehicles and the like, towards a capacity necessary for higher bit-rate multimedia applications such as MPEG2 audio, MPEG2 video, Digital Audio Broadcasting (DAB), Digital Versatile Disk (DVD) and other data.

One proposed embodiment employs asynchronous

transfer mode data transport for the various data types,  
accommodating both high bit rate and low bit rate data  
channels. However, the ATM packet is not limited to the  
conventional ATM packet of 5 bytes of header and 48 bytes  
5 of payload, but is adapted to provide more efficient use  
of bandwidth in the target applications.

Also, compared with D2B Optical (CONAN) technology,  
it is proposed to use a more compact encoding technique  
10 for the fibre interface, such as the 4B5B or 8B10B  
encoding, currently used in FDDI (Fibre Distributed Data  
Interface) for metropolitan area networks (MANs).

Further embodiments are proposed, in which each  
15 network frame includes subframes of at least two  
different modes: "mode 0" subframes provide compatibility  
with the fixed bit-rate (e.g. circuit-switched) CONAN  
technology, while simultaneously the "mode 1" subframe  
provides a group of bytes which can be allocated more  
20 freely to implement a variable bit-rate (e.g. packet-  
switched) channel.

These proposals and surrounding considerations are  
described in the following pages, together with some  
25 alternatives also proposed herein.

## 1. Introduction

This document comprises an outline proposal for a high speed D2B which works with an optical interface (Plastic Optical Fibre). The proposed device is known as the high speed D2B and is designated as C&C Electronics part number HSCI8001.

## 2. Objectives

The objectives of the HSCI8001 development are as follows

- To integrate many of the digital audio and video systems over a common data bus and come up with a suitable protocol that will be able to integrate them.
- Baseline for the High Speed Conan
  - Use of Plastic Optical Fibre
  - Low cost LED Transceiver technology
  - Bandwidth requirements > 25 Mbs
  - Ring Topology for ease of installation, low cost Fibre Optics components and low power consumption...

### 3.0 Requirement Constraints

#### 3.1 Topology

- Point-to-point links
- Linear T bus
- Star system
- Reflective star
- Transmissive Star

#### 3.2 Line encoding

There is a need for a more efficient encoding/decoding technique than what is currently used on the current Conan chip (BI-PHASE). One type

of encoding/ decoding technique that is currently used in FDDI which would be considered is the use of 4B5B encoding technique. This would provide the High speed network a reliable and efficient technique.

- BI Phase encoding for current Conan design
- 4B5B/8B10B

### 3.1 Data rate Requirements

- Parameters identified for the various digital audio video systems for integration over a common databus. The tabulated values indicate the some of the overriding parameters between systems..

Data Type	Variable Bandwidth Requirements	Common Frequency	Frame Structure
MPEG2 Audio	up to 912kbps	48kbps	
MPEG2 Video	1.55 to 4Mbps		
DAB	1.5Mbps?	48kHz	16-32 Bits
DVD	11.08Mbps		2048bytes Packet
CD	1.44Mbps	44.1kHz	16-24Bits
ATM (Use this as a Transport for above Data Types)			Similar to 5bytes of Header and 48 Bytes of Payload

### 3.4 Topology

The communications network forms a backbone of most architectural designs and hence the interconnections can influence the final design. Network topology fall mainly into three categories.

For the application that we are considering a Ring topology is still the preferred option as it means that the components available for the Optical network will still be relatively cheap and low power, rather then going to a relatively expensive star network.

These point are discussed further in the sections below. But it is highly likely that if in a large network environment if the system could not handle the delay

then a star network could be the way forward if the components become available for the Plastic Fibre optics and are relatively cheap.

### Point-to-point links:

Point to point dedicated links are used in two ways. Firstly by a dedicated link between each communicating function. Secondly by a dedicate link between terminals and using electronics in each terminal to strip off data which is addressed to that particular terminal and pass any further data to other terminal.

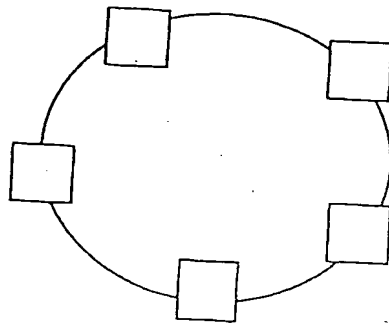


Fig. 1

### Linear T- Bus

These are relatively simple to implement if using voltage mode or current mode coupling and provide a broadcast medium that allows all terminals to simultaneously listen to the traffic on the network. This has been used in many of the electrical broadcast bus designs, but is far less popular for optical systems as the excess loss at each junction leads to extremely large link power budgets.

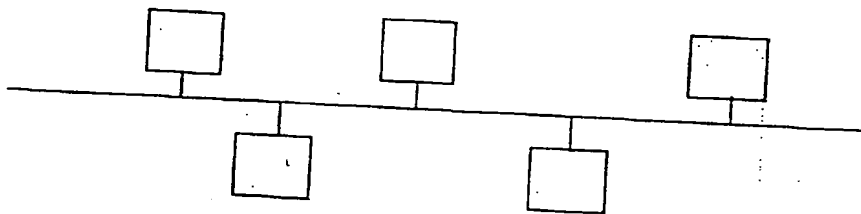


Fig. 2

### Stars

These can split light from a fibre into a number of other fibres in a reversible manner, that is 1:n or n:1. Many networks using fibre optics are implemented using a topology based on reflective and transmissive star couplers. But the cost penalty is higher.



## Reflective Star

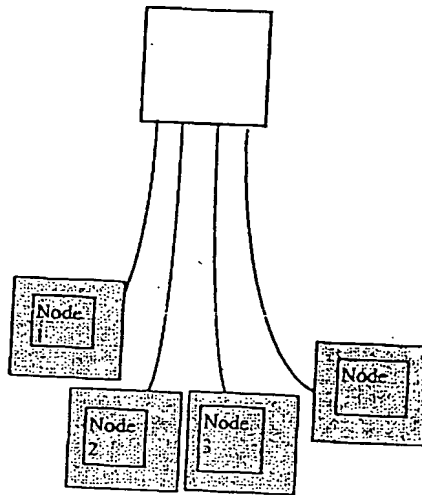


Fig. 3

## Transmissive Star

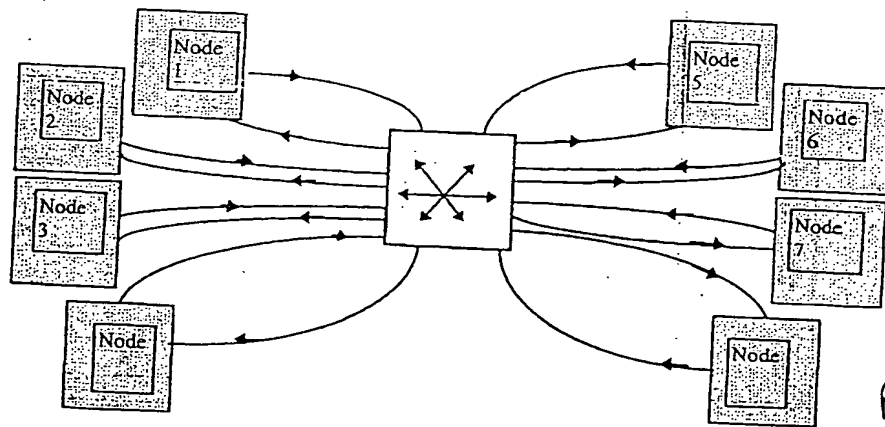



Fig. 4

Detailed Proposal

5 The following pages present an embodiment of a High Speed D2B network offering high speed variable bit rate channels simultaneously with fixed rate channels compatible with the known "CONAN" technology (and with the proposed "SuperCONAN" technology having an increased capacity of fixed data rate channels).

- Synchronous, connection oriented data transfer ( mode 0).
- Asynchronous, connection-less data transfer (mode 1).
- Total bus capacity can be shared between modes 0 and 1.
- Bus running at an instant mixed frame rate in the range 16 - 50 kHz. Specific frame rates which are currently foreseen are CD at 44.1 kHz, DAB/DVD Audio at 48 kHz and telephony audio at 16 kHz.
- The total minimum source data rate is 4 times higher than for current D2B Optical
- For data transfer mode 1, the prioritisation of message and/or devices should depend on the application.
- Backwards compatibility with current D2B Optical.

# Multi-Speed D2B Ring - Compatibility

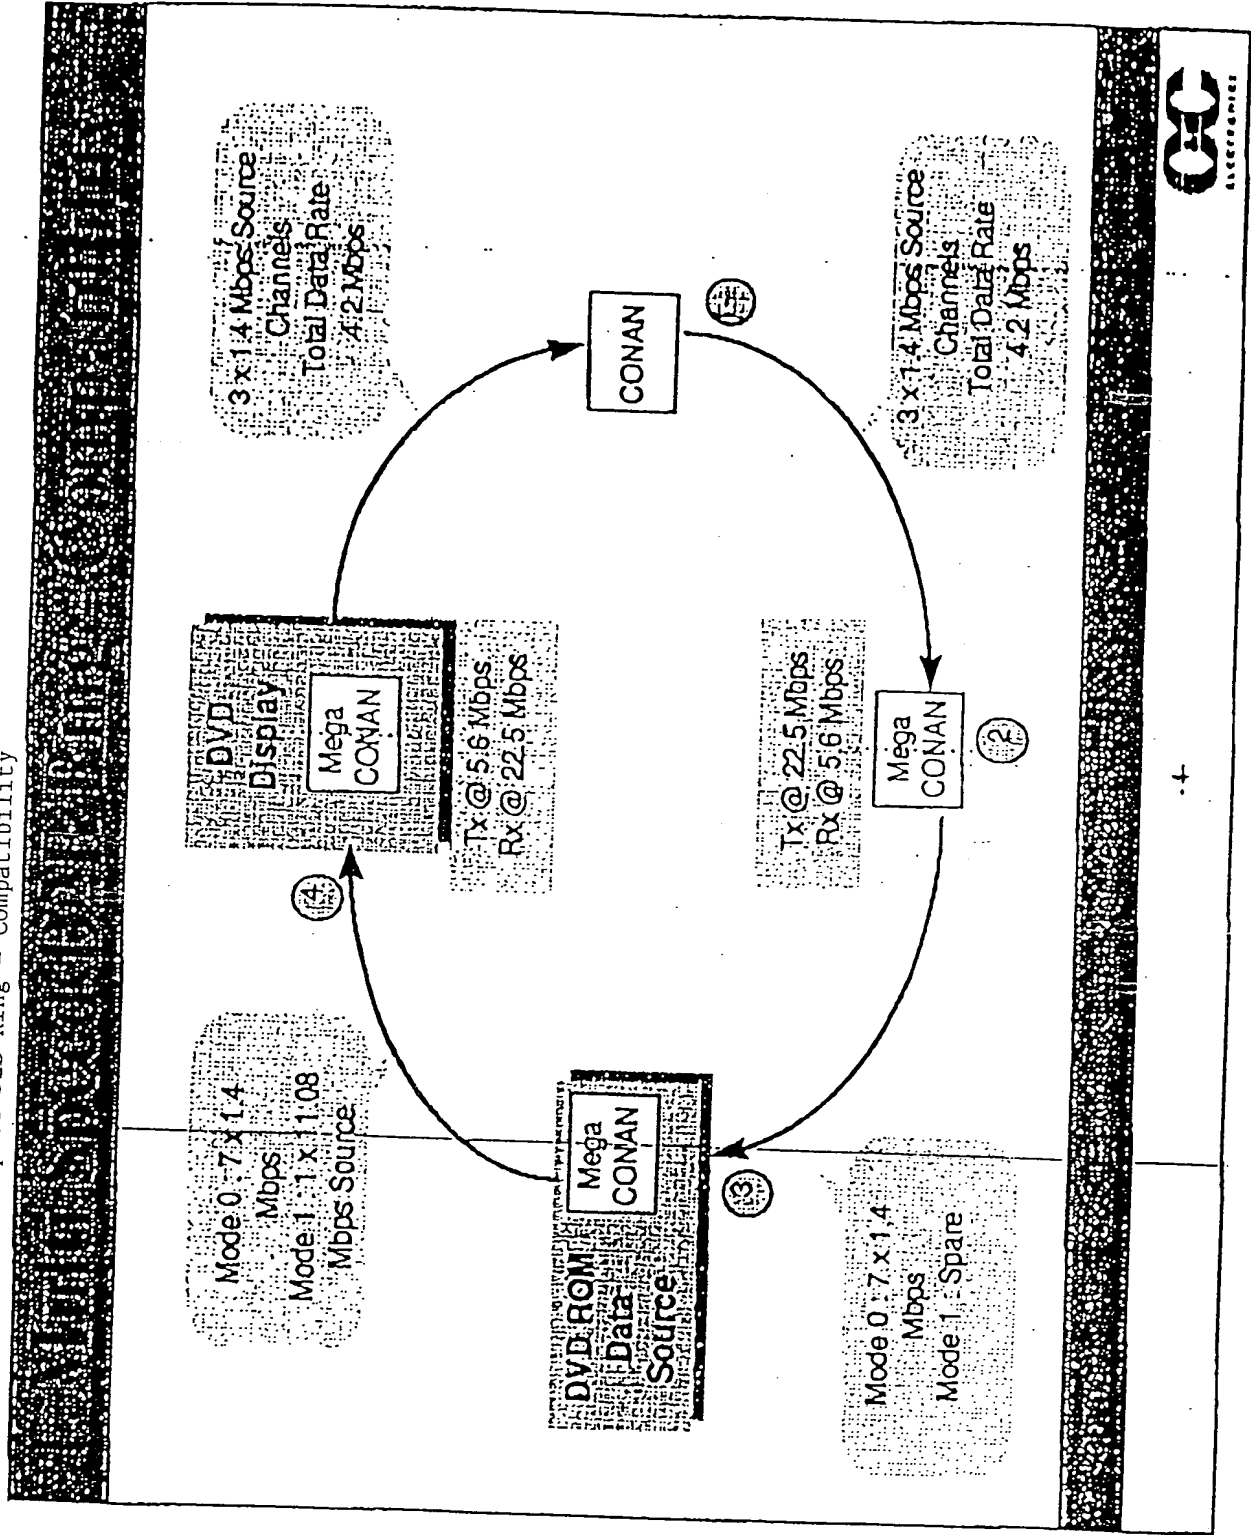


- DVD Summary

- Maximum 17 GByte storage (c.f. 680MByte for CD)
- Interactive video requires control info exchange
- Typical image resolution corresponding to MPEG2 Main Level Main Profile : 720 (H) by 480 (V) pixels at 30 fps : 9.8 Mbps max
- Dolby AC3 5.1 audio : 48 kHz sample rate : 448 kbps max
- MPEG2 7.1 audio : 48 kHz sample rate : 912 kbps max
- Average data rate of 4.69 MBPS (depending on content)
- Peak information rate of 10.08 MBPS
- Peak System layer rate of 11.08 MBPS

- DVD ROM Part 3 Specifies mapping of audio datastreams to IEC958


# Possible Automotive DVD/D2B Topology

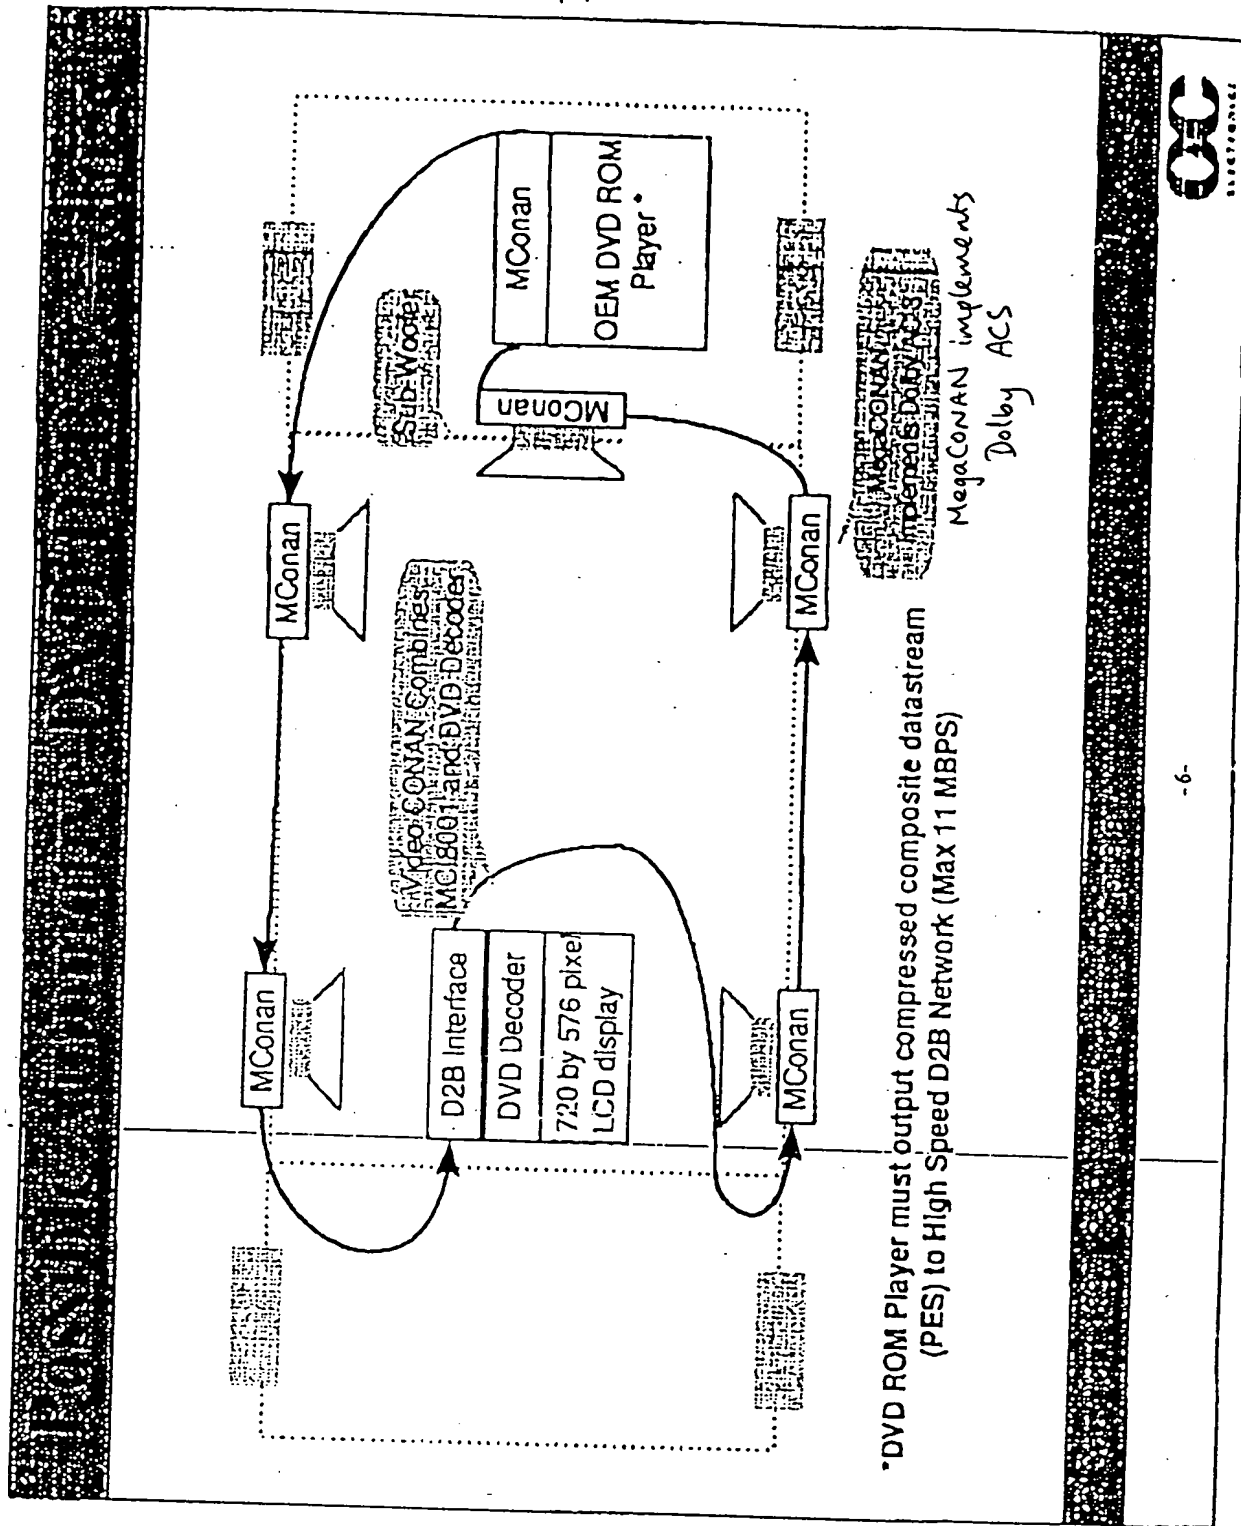

\*DVD ROM Player must output compressed composite datastream (PES) to High Speed D2B Network (Max 11 MBPS)

# High Speed D2B Frame Structure


12

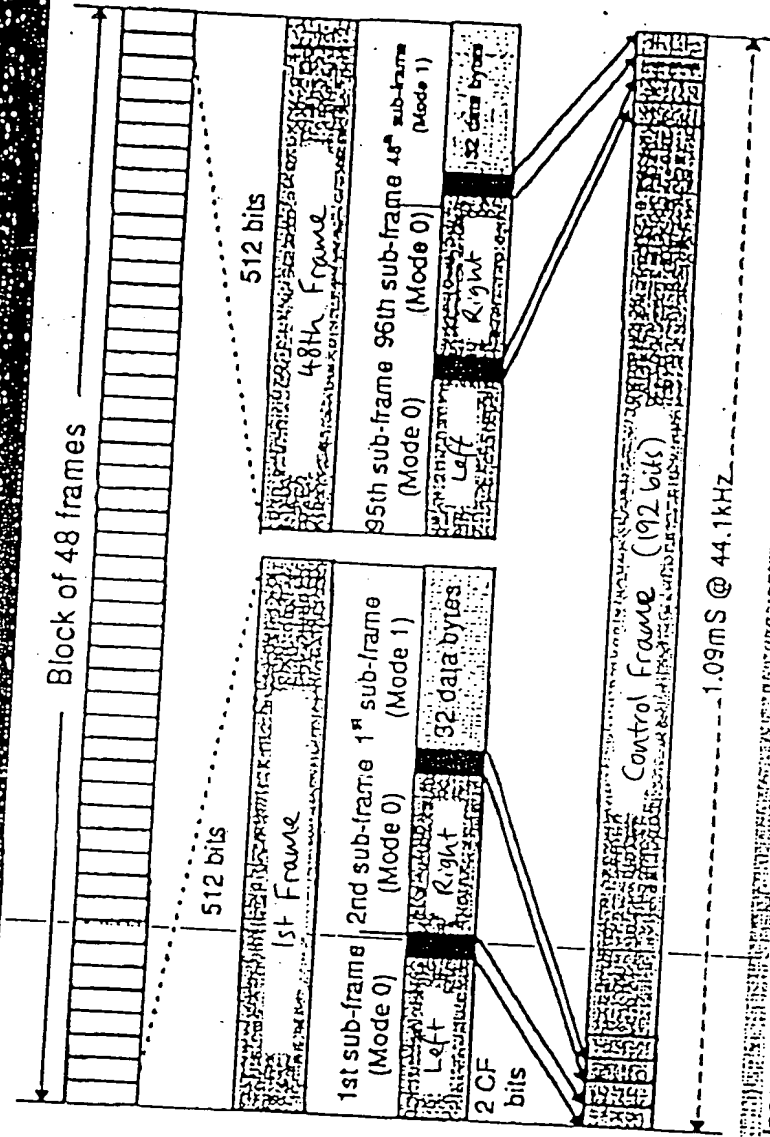

Increase number of bits in frame to 512 (x2 relative to SuperCONAN) and create a 32 byte Mode 1 sub-frame for transfer of packet based data streams  
 Gross bit rate at 48 kHz = 24.576 MBPS (512 x 48 kHz)  
 This allows backwards compatibility with CONAN and SuperCONAN based D2B Systems

In other systems sub-frame order and sizes can be different within each frame, and size of control frames can vary.


# High Speed D2B Sub-frame Structure (Mode0)

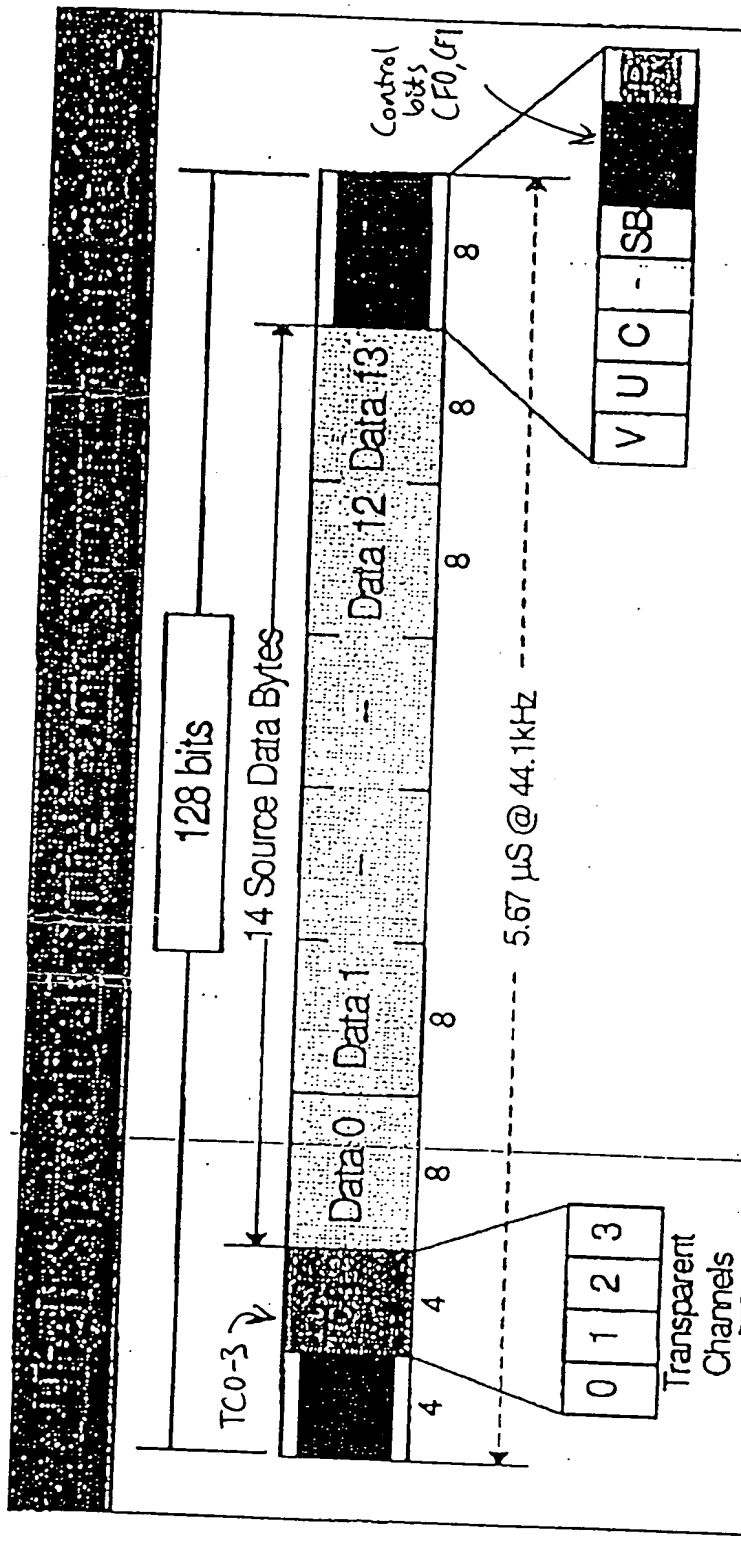

Source data rate =  $2^8 \times 14 \times 48 \text{ kHz} = 10.752 \text{ MBPS}$   
 Multiple (up to 7) CD audio channels compatible with Super  
 CONAN frame structure  
 two such sub-frames (Left and Right) per frame  
 Circuits switched connection i.e. capacity remains fixed  
 throughout duration of connection



# High Speed D2B Sub-frame Structure (Mode 1)

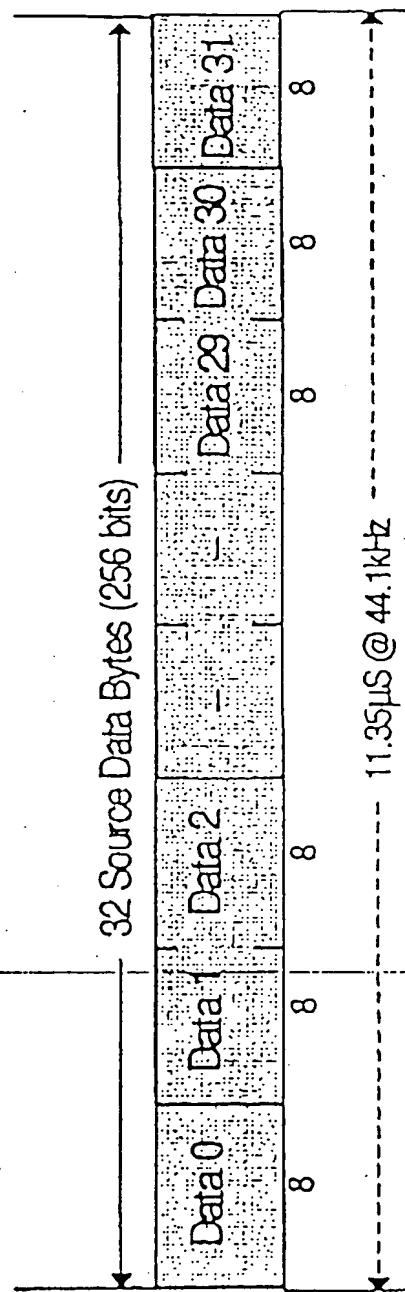

Packet based transport allowing mix of variable bit rates in quantities of 1 byte per subframe (equal to a source data rate of 384 KBPS at  $F_s = 48$  kHz) up to a maximum of 32 bytes per sub-frame (equal to a source data rate of 12.288 MBPS)

Dynamic Allocation of source channel capacity In Mode 1 could be communicated using the control channel For example during the transfer of a DVD image the required data rate may vary - thus a variable bit rate control protocol could be used to assign and de-assign more or less data bytes (1-32) on a multi-frame basis (ie a control frame comprise 48 source data frames and therefore the minimum time for modifying the Mode 1 source data rate is approx 1.09 msec

Alternatively a Fast Control Channel (FACCH) could be used comprising Data 0 (384 kbps) for capacity allocation



## DVD Dynamic Rate Control


- Image resolution of 720 by 480 pixels encoded using 4:2:0 YCrCb video = 124.416 MBPS. Max compressed video rate is 9.8 MBPS.
- Minimum MPEG2 compression ratio for DVD is 12.7:1.
- Maximum of 41 kbyte per frame or 218 PES payloads each of 188 bytes. (1 PES payload every 160 usec)
- Inter-frame encoding drives compression therefore, max rate of change of data rate is once per frame - approx 30 msec
- Options for dynamic allocation of High Speed D2B Mode 1 capacity are :
  - Use control channel -30 control frames every video frame ? Problem with retry timeouts ? (Depends on traffic and arbitration)
  - Use Fast Associated Control Channel (FACCH) eg dedicated packet 1 (384 kbps) to allocate Mode 1 capacity

- Need to analyse and define control channel requirements in order to determine if more (or less) capacity than current 176 kbps is required
  - Construct simulation of typical D2B networks including DVD players and calculate control channel rate for alternative network proposals.
  - Repeat above exercise for packet based DVD data streams to determine how variation of DVD data rates affects Mode 1 data transfer and control channel capacity
- Decide on improved line coding approach -
  - eg 20% overhead using a 4B/5B code as used in FDDI networks
- Mode 1 Layer 2/3 capacity allocation could be defined in next step ?

- Implements all features of High Speed D2B
- Part Number MCI8001
- D2B Gross data rate in excess of 24.576 MBPS at  $F_s = 48$  kHz and before line coding to FOT
- Two Simultaneous Communication modes :
  - Mode 0 : Circuit switched for CONAN and Super CONAN interface
  - Mode 1 : Packet switched for variable data transfer rate from 384 kbps to 12.288 MBPS at  $F_s = 48$  kHz
- High performance integrated stereo audio CODEC
- Fully backwards compatible with CONAN and D2B Optical networks to allow multi-speed D2B networks to be constructed

# "MegaCONAN" chip architecture

Part Number: MC8001  
 Status: Feasibility Stage  
 Possible Package: 64 TQFP/LQFP

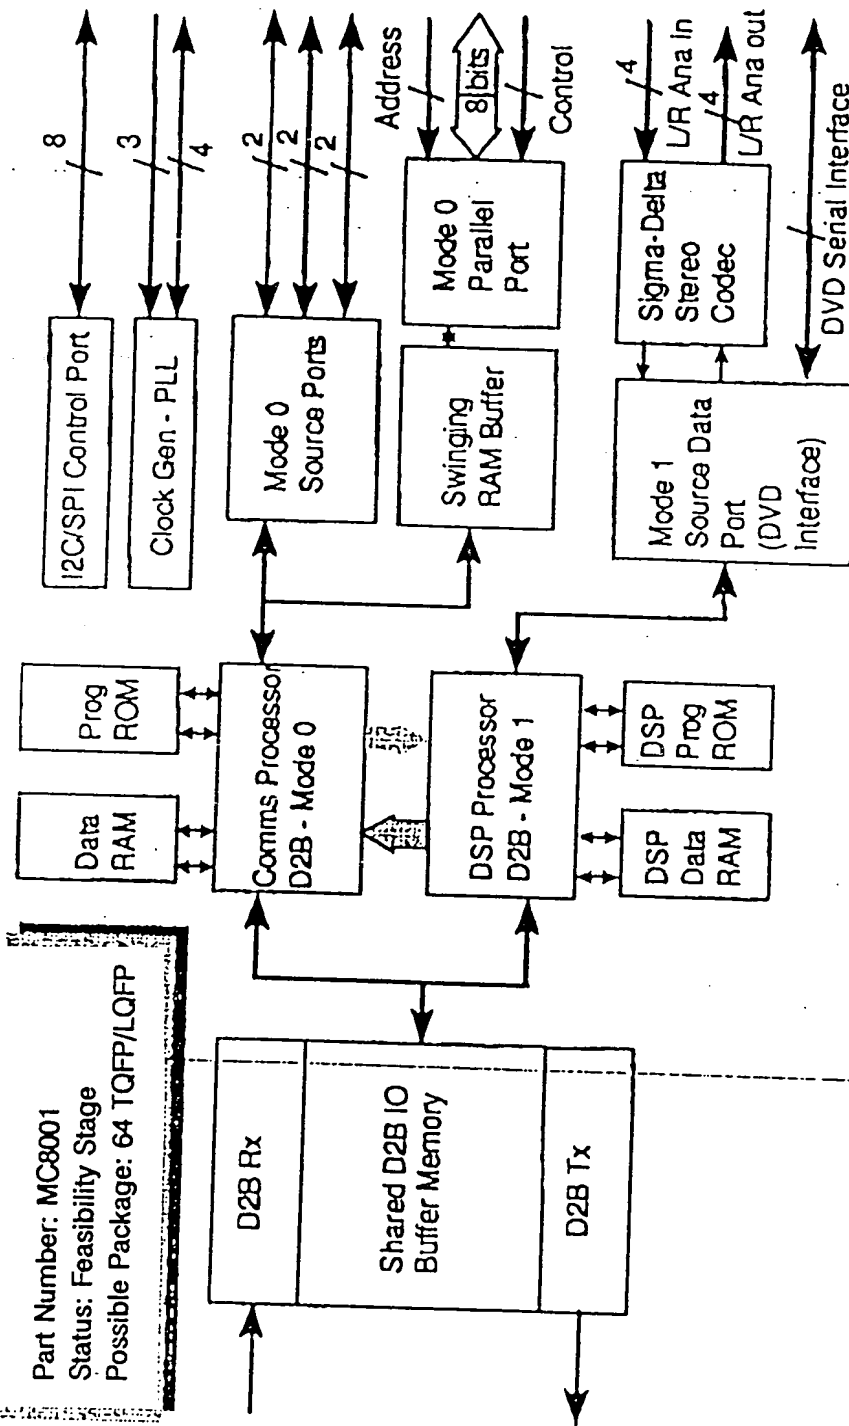

APPENDIX - CONAN IC DATA SHEET PAGES 5-32


# 1. Introduction

## 1.1 Overview

The Conan technology is a leap forward in the development of Communication and Information networks for automotive consumer electronics products. It combines Source Data (digital audio, video or any other high-volume, real-time digital data) and Control Data, with the advantages of the Plastic Optical Fibre medium (i.e. high data capacity and immunity to interference and noise).

To achieve effective network design and facilitate product implementation, the OCC8001 Optical Transceiver ('Conan') provides maximum functional integration, including source data routing, communication management and all communication protocol tasks.

Conan supports network protocol standards such as D2B Optical, and is fully compatible with systems built on a D2B Optical network.

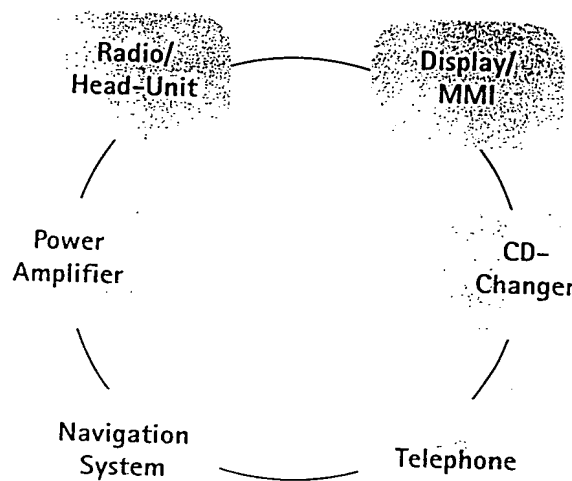

*Example System with a Ring Topology*

The data throughput on a Conan network is impressive. At a sampling rate  $f_s$  of 44.1 kHz, it offers:

Source Data	4.2 Mbps (equivalent to 3 x 16-bit stereo audio channels).
Control Data	Up to 176.4 kbps (918 control frames per sec).
4 Transparent Channels	Up to 88.2 kbps each.

## 1.2 Features

Conan has been optimised for implementation in consumer electronics products, and offers these features and benefits:

Features	Benefits
Integration of Source & Control Data	Reduces the number of components required for signal distribution and control
Multiple Source Data Channels	Allows simultaneous bi-directional transmission of multiple source data channels
Multiple Source Data Ports	Only one Conan needed per product, even with several internal sources or destinations.
Multiple Source Data Formats	Adaptability to a variety of components which support different digital data formats
SPDIF Audio Port	Provides easy integration with existing digital audio products
I2C- and SPI-compatible Control Ports	Easy interface to wide range of microprocessors
Flexible Source Data Routing	Versatile use of the network capacity
Transparent Channels	Easy implementation of proprietary control messaging
Programmable Clock Manager	Easy integration in different products
Flexible Synchronisation	Network clock may be derived from a variety of sources
Low Jitter PLL	Low jitter ensures high audio quality (i.e. low THD and low noise)
Fail-safe mechanism (Electrical Bypass)	In case of device failure, network operation can be maintained
Network Position Identification	Each device can get its position on the ring
Versatile Control Messaging	Different addressing methods (incl. broadcast) make best use of control channel capacity
Automotive Temperature Range	-40°C to +85°C (contact C&C for wider ranges)




## 1.3 Applications

Conan has been specifically designed for easy implementation and integration of networked audio, video and communication products. Conan is optimised for use with (but not limited to) a ring topology, based on plastic optical fibre, for automotive applications, though can be equally well employed on other media (e.g. copper) and for other application areas.

Products at nodes on the network can be sources or destinations for source data (or both, or neither), for example, CD-Changer (source), Amplifier (destination), Radio/Head-Unit (source and destination).


A product can generate source data for transport on the network, and/or retrieve source data from the network. It can additionally send or receive control messages. Conan may be incorporated into a product as shown below.

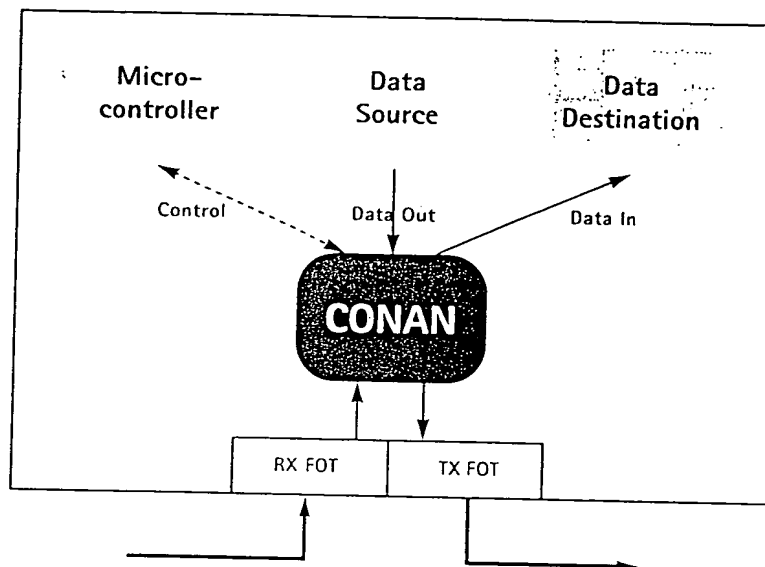

*A Conan Device on the Network*

To achieve the highest possible efficiency, the network timing is synchronised to a System Master. The System Master is a product on the network which is able to generate the timing for the entire network. Only one Master device may be active on the network at any time. All other devices are Slaves. The Slaves get their timing from the Master by recovering the clock from the bit-stream received from the network. Conan can be configured by software as either a Master or a Slave. Up to 24 nodes may be present on the network.

## 1.4 Block Diagram

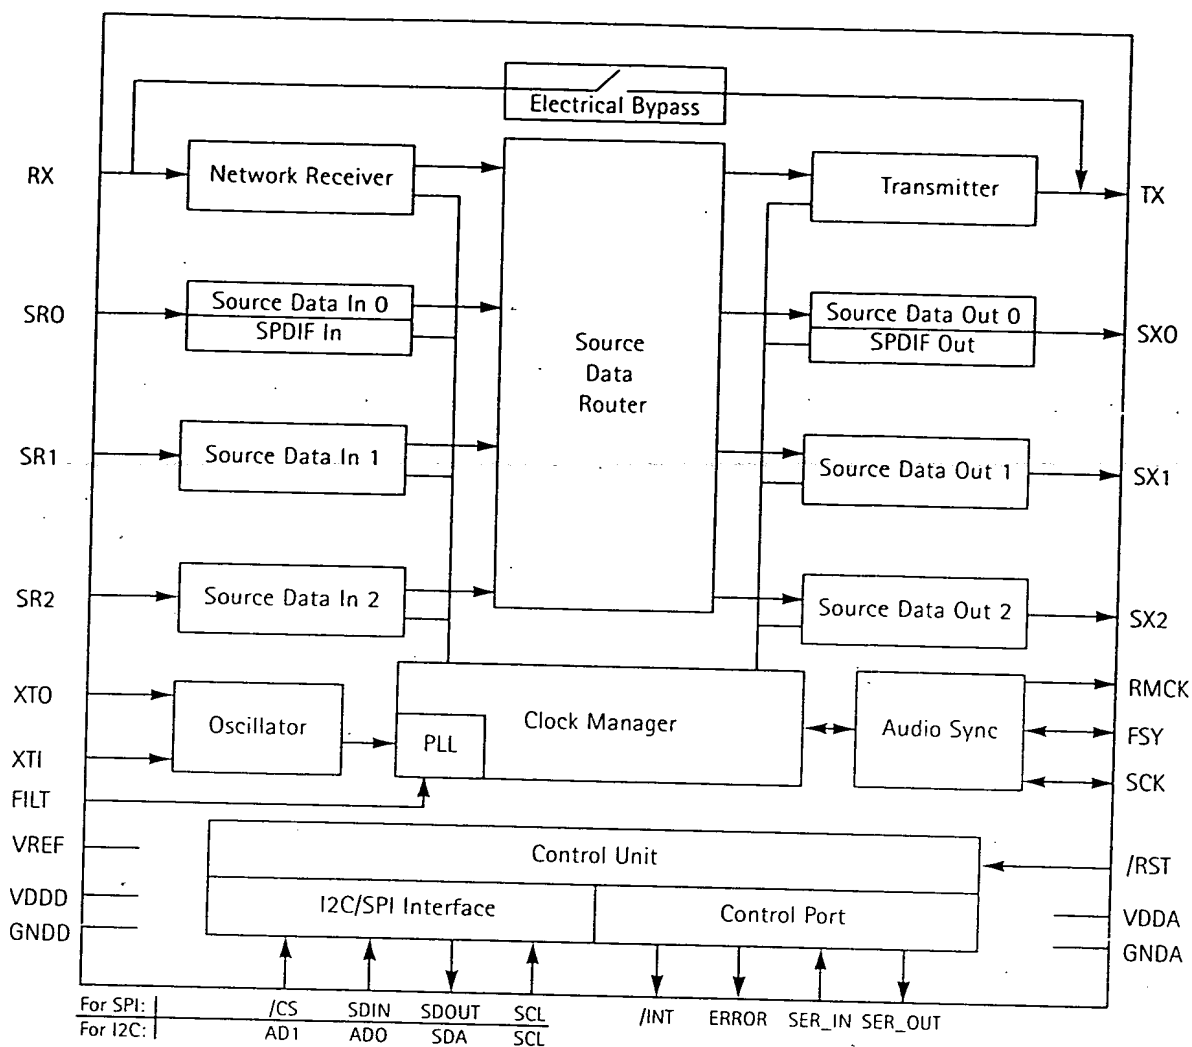

*Conan Block Diagram*

Conan contains a Network Transceiver (Rx and Tx) to interface to the network. The network receiver recovers the clock and decodes the incoming bit-stream. The network transmitter encodes the outgoing data and transmits it on the network. Conan can be configured by software as either a Master or a Slave node on the network.

Conan provides flexible access to up to 12 source data bytes within one frame (e.g. configured as three 16-bit stereo channels) on the network. The three source data input ports (SR0, 1 & 2) and three source data output ports (SX0, 1 & 2) can transfer 8, 16, 24 or 32 bit source data into/out of the Conan through the Source Data Input and Source Data Output registers.

The Router provides an easy and flexible way of controlling the routing of source data. All source data bytes, coming either from the network receiver or from the source data input ports can be re-arranged, mixed and re-directed to the network transmitter or the source data output ports. Conan can also support SPDIF (also known as AES/EBU or IEC-958). Conan can even be used to route source data locally, from I.C. to I.C., within a product.

In Slave mode, Conan's timing is derived from the incoming bit-stream. The network receiver recovers a clock from the incoming bit-stream using a low jitter, clock multiplying, phase locked loop (PLL). The PLL will lock to incoming bit-streams with sample rates of 30 to 50kHz. On loss of lock, the PLL is pulled to its lowest frequency (to minimise EMI).

In Master mode, Conan's timing may be derived from a crystal, a source data clock applied to SCK or an SPDIF channel applied to SRO. The Oscillator circuitry allows a crystal to be connected directly to XT1/XTO, or some other clock source to be used. The PLL multiplies-up this timing source. The RX pin is over-sampled by a high-frequency clock and data is recovered by a digital state machine.

An Electrical Bypass between RX and TX pins allows a node to be bypassed electrically. This bypass is automatically activated on power-up or reset as a safety feature. It helps to reduce the network start-up time, and can also be used as a fail-safe to isolate the node in case of loss of lock or other product failure (typically triggered by a watch-dog function).

The Control Unit provides the interface from Conan to a microprocessor. It provides an I2C- or SPI-compatible interface, interrupt and error outputs, and transparent channel input/output. Conan is a slave on I2C/SPI, so transfers must always be initiated by an external master.

Internal registers are used to buffer the source data and control messages. It also contains the Routing Information Table (RIT) and control and status registers. These registers are accessible for reading or writing through the I2C/SPI interface.

## 1.5 Package Pin-Out and Pin Descriptions

SCL	1	28	SDIN or ADO
SDOUT or SDA	2	27	ERROR
/INT	3	26	SER_OUT
RX	4	25	SER_IN
TX	5	24	/CS or AD1
RMCK	6	23	/RST
VDDD	7	22	VDDA
GNDD	8	21	GNDA
SX0	9	20	FILT
SX1	10	19	VREF
SX2	11	18	XTO
FSY	12	17	XTI
SCK	13	16	SR2
SRO	14	15	SR1

Pin	No.	I/O	Function	Pin	No.	I/O	Function
SCL	1	In	I2C & SPI clock	SDIN or ADO	28	In	SPI data in or I2C address select
SDOUT or SDA	2	Out	SPI data out or I2C data	ERROR	27	Out	Error indicator
/INT	3	Out	Interrupt output (open drain)	SER_OUT	26	Out	Transparent channel out
RX	4	In	Network receive	SER_IN	25	In	Transparent channel in
TX	5	Out	Network transmit	/CS or AD1	24	In	SPI chip select or I2C address select
RMCK	6	Out	Received master clock	/RST	23	In	Reset (active low)
VDDD	7	-	Power rail	VDDA	22	-	Power rail
GNDD	8	-	Ground	GNDA	21	-	Ground
SX0	9	Out	Source data output port 0	FILT	20	-	Loop filter
SX1	10	Out	Source data output port 1	VREF	19	In	PLL voltage (and reset timing)
SX2	11	Out	Source data output port 2	XTO	18	Out	Crystal out
FSY	12	I/O	Frame sync.	XTI	17	In	Crystal in
SCK	13	I/O	Shift clock	SR2	16	In	Source data input port 2
SRO	14	In	Source data input port 0	SR1	15	In	Source data input port 1

### Pin Descriptions


All pins are CMOS TTL logic level, except power, ground, FILT, VREF, XTI and XTO.

## 2. Functional Description

### 2.1 Data Transport

The source data and control messages are transported on the network from node-to-node in *frames* generated by the System Master. Frames are circulated at the same rate as the system sampling frequency, typically  $f_s = 44.1\text{kHz}$ . Frames are grouped into *blocks* of 48 frames.


The frame is divided into two *sub-frames* ('left' and 'right'). At  $f_s = 44.1\text{kHz}$ , there will be 88,200 sub-frames per second. The left sub-frame is always the first of the pair transmitted on the network. At the physical level, bits are transported with bi-phase encoding. The relationship between the block, frame, sub-frame and control frame is shown below.

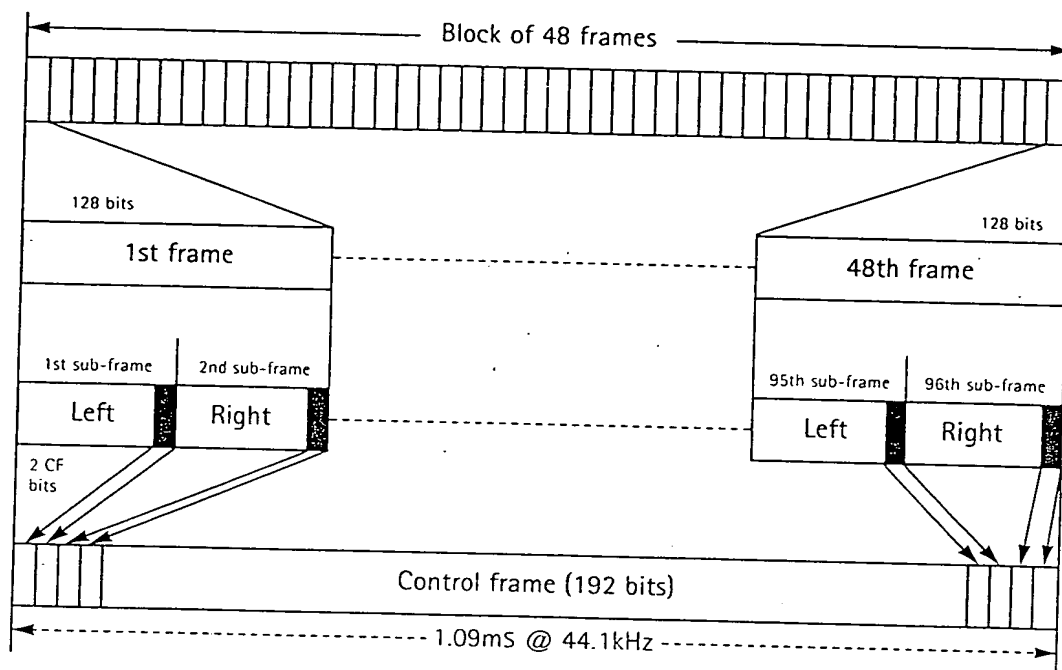

*Block, Frame, Sub-frame and Control Frame Relationship*

#### 2.1.1 Conan Sub-Frame

Each sub-frame contains 64 bits, handled within Conan as 8 byte fields. The fields comprise the preamble, the transparent channels, 6 bytes of source data, and 8 control/status bits which make up the control frames and the SPDIF status bits. The sub-frame is shown below.

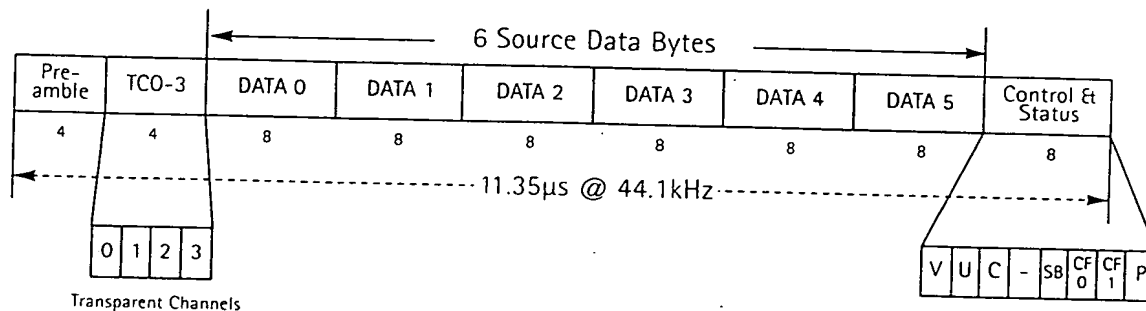

*Conan Sub-frame*

## Preamble

The preamble synchronises the network receiver. There are three types of preamble, identical to those defined in the IEC958 specification. They contain bi-phase coding violations which the receiver can recognise. The three unique preambles identify left, right and block sub-frames. The left preamble identifies the beginning of a frame and the block preamble identifies the beginning of a block. The block preamble replaces every 48th left preamble. This provides a block structure to which the control frame data is synchronised.

## Transparent Channels

The four TC bits enable the transport of four serial channels for proprietary control or status information on the network, with no additional hardware or software overhead. The use of these channels is left open to System Integrators, who must define their own protocols for applications. Typical applications include the transport of raw control or status information, such as RS232-type data, VICS data, GSM data, PIN Card data, etc.

## Source Data Bytes

The source data bytes carry the high-volume real-time digital source data. The twelve bytes per frame may be allocated flexibly, so that the devices in a system may use the source data bytes in the most efficient way for that system. The mechanism used for allocating the bytes is described in section 2.4, Source Data Routing.

## Status Bits

If an SPDIF channel is being transported, the V, U and C bits contain the validity, user and channel status bits of the SPDIF channel. The left/right convention of these bits is determined by the left/right preambles of the Conan sub-frame.


The Start Block bit SB identifies the block boundary of a synchronous SPDIF channel and is set after every block of 192 frames (synchronised with the SPDIF signal that is being transported). This synchronisation is performed automatically by the chip. The Parity bit P generates even parity for the entire sub-frame.

## Control Bits

The control bits CF0 & 1 carry the control messages (for controlling devices and sending status information). There are 2 CF bits per sub-frame, and a control frame is 192 bits long, therefore 96 sub-frames (48 left + 48 right) are required to build-up a complete control frame. The control frame is described in the next section.

### 2.1.2 Control Frame

The control frame is assembled from and aligned with a block of 96 sub-frames, i.e. the first two bits of a new control frame are taken from the sub-frame with a block preamble, and subsequent pairs of bits are taken from subsequent sub-frames to build up a control frame.

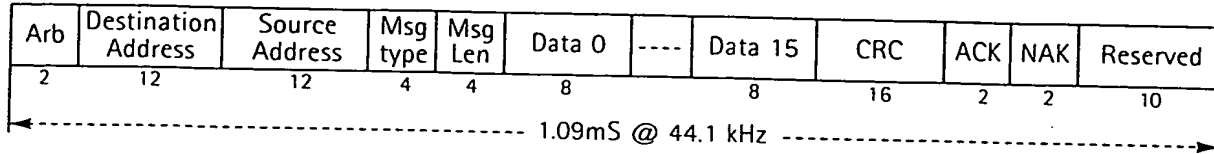

#### Control Frame

The fields of the control frame are:


- **Arbitration bits :**  
These indicate if the control frame is free or occupied. Conan handles these bits automatically.
- **Destination Address**  
This is the 12-bit device address of the destination of the message, in the range '000'H to 'FFF'H. The sending device writes this into its message transmit buffer for transmission. Certain addresses and address ranges have special meanings (see section 2.6).
- **Source Address**  
This is the 12-bit device address of the sender of the message, in the range '000'H to 'FFF'H. The receiving device can read this from its message receive buffer after reception. Certain addresses and address ranges have special meanings (see section 2.6).
- **Message Type and Length**  
Two 4-bit fields normally used to indicate the type/length of the message. These bits are transported transparently by Conan.
- **Data 0 to 15**  
The message data. All 16 bytes are always transported. The Message Length normally indicates how many of the 16 bytes are actually valid for the message. The sending device writes this into its message transmit buffer for transmission. The receiving device can read this from its message receive buffer after reception.
- **CRC**  
A 16-bit Cyclic Redundancy Check value used to verify that the control frame has been transported without error. The CRC is generated by Conan automatically on message transmission and checked by Conan automatically on message reception.
- **ACK/NAK**  
Acknowledge and Not Acknowledge (2-bits each) indicate successful message transmission. The use of separate ACK and NAK flags allow reliable point-to-point *and* broadcast message transport. The flags are automatically filled by the destination device(s) (if present) and read by the sending device.
- **Reserved : 10 bits reserved.**

## 2.2 Source Data Ports and Formats

To maximise the application versatility of the chip, six source data ports are provided. This means that a product which needs to process source data for more than one internal source or destination can do so with only one Conan. These source data ports can transfer 8, 16, 24 or 32 bit source data, left or right adjusted, in to and out of the device.

The source data ports provide access to the source data in the network bit-stream. Data can be input through three serial inputs (SR0, 1 & 2) and output through three serial outputs (SX0, 1 & 2). All six ports use a common frame synchronisation FSY and a serial bit clock SCK. FSY and SCK may be set as either inputs or outputs, depending on the external hardware. If they are configured as inputs, then the data source(s) must be clocked by RMCK to be synchronised in frequency to the network bit-stream (although not necessarily in phase).

With the control bits in the Source Data Port Control register, a variety of source data formats can be selected. Some common formats are shown in the following diagram:

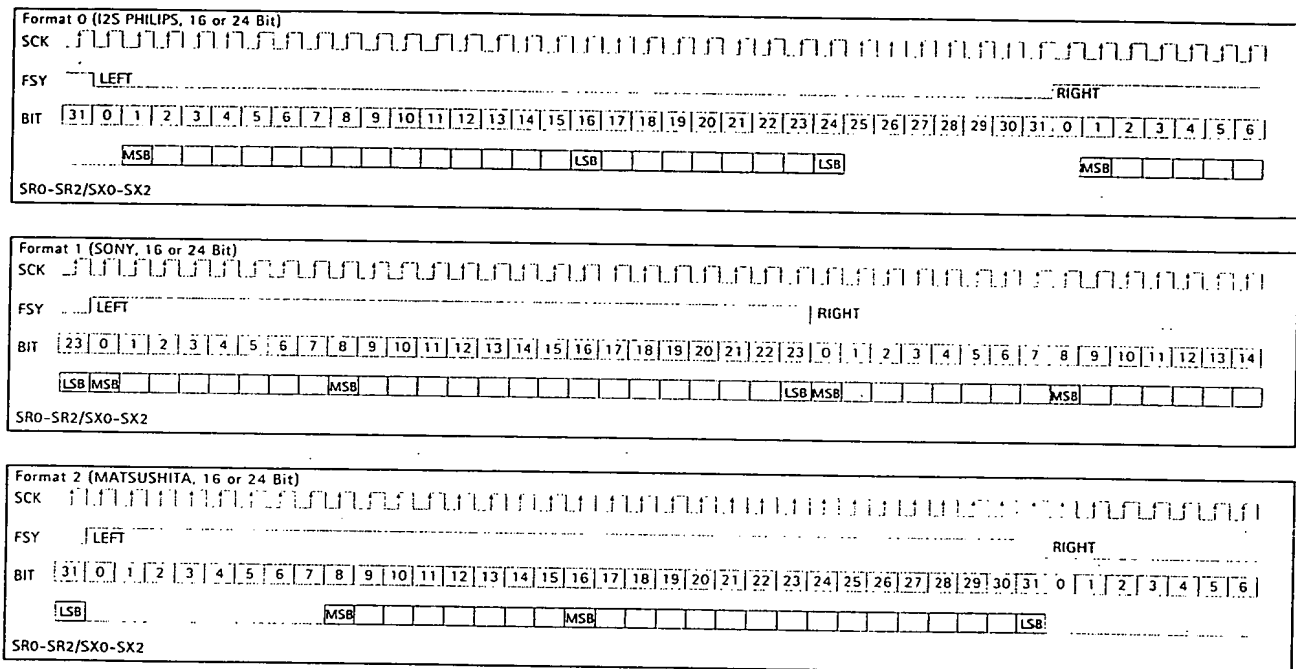

### *Some Common Source Data Formats*

The register settings for these modes are given in section 4.1.4.

The way that source data presented to the input ports is routed to the outgoing bit-stream, and the way the incoming bit-stream is routed to the output ports is determined by the source data routing, is explained later.



## 2.3 Source Data Port Synchronisation

In a Conan network, the timing of all slave nodes is synchronised to one System Master. A slave node (e.g. a CD-Changer, Amplifier) must synchronise itself to the network by recovering the clock from the received bit-stream. The synchronisation of the source data between the I.Cs and Conan inside a product is achieved using the SCK, FSY and RMCK signals.

SCK is the 'bit clock' (also known as 'shift clock') for the source data. FSY is the 'frame synchronisation' which indicates 'left' or 'right' data. Conan's SCK and FSY pins can be configured as either inputs or outputs with the I/O bit in the Source Data Port Control register.


RMCK is the clock recovered from the network ('Received Master Clock'). The RMCK pin is an output only. The RMCK output frequency is always a (known) multiple of the sampling frequency (e.g.  $384f_s$ ), set in the Clock Manager Control register.

### 2.3.1 Synchronisation in a Slave

A slave node can act as a source or destination (or both or neither) for source data. In a source node, the outgoing source data must be synchronised to the network. This means that the I.Cs in the source node which generate the source data (e.g. a CD decoder chip) must be locked to the incoming network clock in frequency (but not necessarily in phase). In a destination node, the I.Cs which process the source data (e.g. D/A converter) must be locked to the incoming network clock in the same way.

#### 2.3.1.1 Source Example 1 (CD-Changer)


Here a CD-Decoder is clocked by RMCK from Conan. The CD-Decoder gives Data to Conan in synchronism with RMCK. SCK and FSY could be either outputs from the I.C (as shown) or inputs, depending on what the I.C supports.

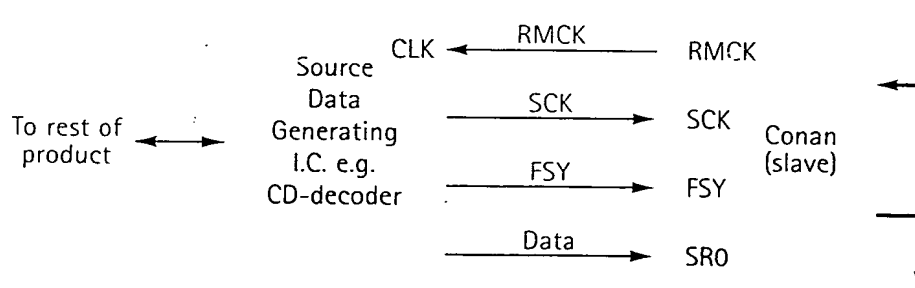

*CD-Decoder clocked by RMCK*

#### 2.3.1.2 Source Example 2 (CD-Changer)


Here the CD-Decoder gives the Data to Conan in synchronism with SCK. RMCK is not used. In this configuration, SCK and FSY must be inputs to the I.C (as shown), so that the CD-Decoder can synchronise to SCK.

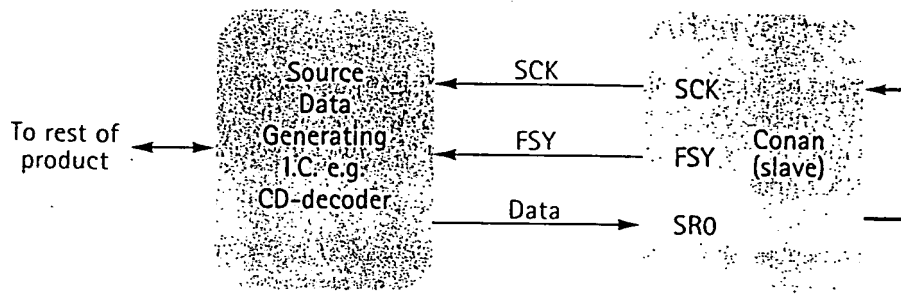

*CD-Decoder clocked by SCK*

### 2.3.1.3 Destination Example (Amplifier)

Here the D/A converter is clocked by RMCK from Conan. The D/A converter gets Data from Conan in synchronism with RMCK. SCK and FSX could be either inputs to the I.C. (as shown) or outputs, depending on what the I.C. supports.

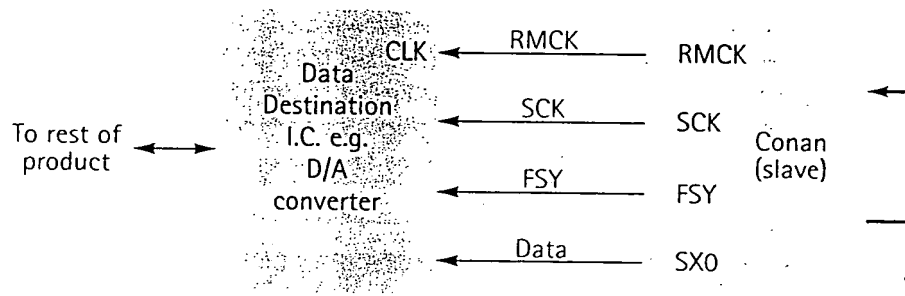


*D/A Converter clocked by RMCK*

## 2.3.2 Synchronisation in the System Master

The System Master generates the timing for the whole network. A System Master can act as a source or destination (or both or neither) for source data. For a source or destination node (or both) the I.C.s which process the source data must be clocked by RMCK derived either from a crystal or an external master clock.

### 2.3.2.1 Example (Radio/Head-Unit)


Here the CODEC is clocked by RMCK from Conan. The CODEC gives/gets Data to/from Conan in synchronism with RMCK. SCK and FSX could be either outputs from the I.C. (as shown) or inputs, depending on what the I.C. supports.

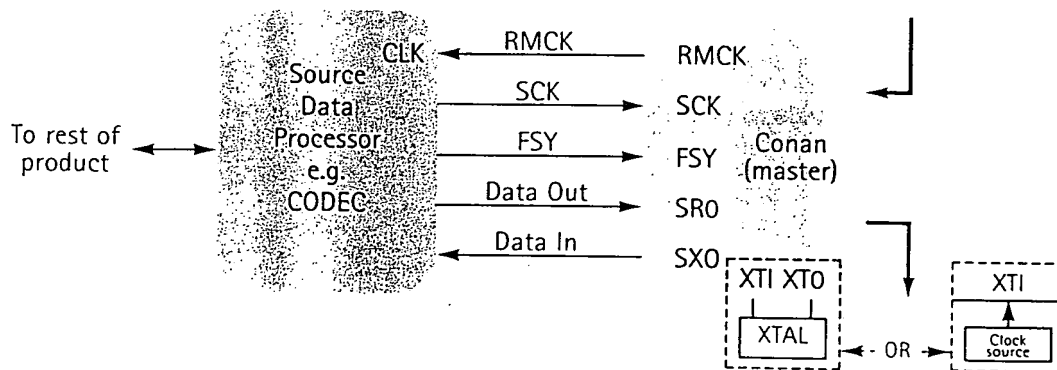

*Synchronisation in the System Master*

## 2.4 Source Data Routing


The Router provides an easy and flexible way of controlling the routing of source data. All source data bytes, coming either from the receiver or from the input ports can be re-arranged, mixed and re-directed to the transmitter or the source data output ports. All source data inputs are double-buffered to allow re-synchronisation. The following figure shows the source data inputs and outputs of the chip, with the router in-between.

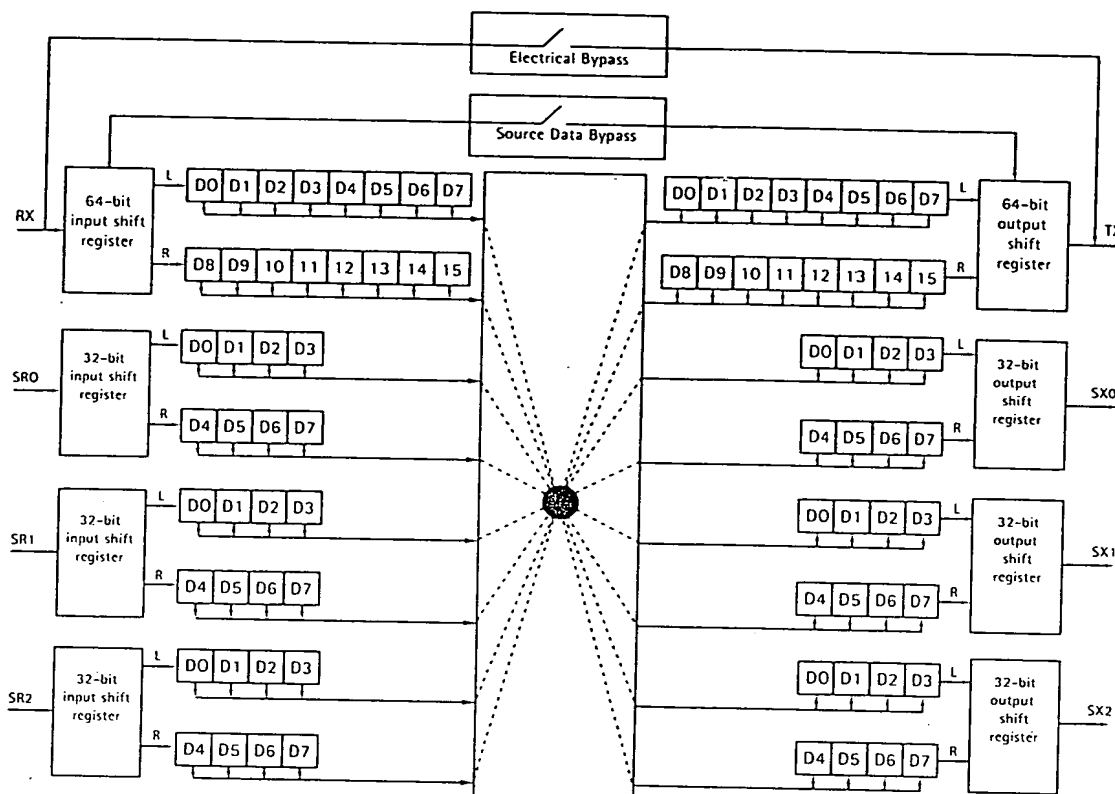

*Source Data Router*

An incoming (serial) sub-frame is shifted into Conan bit-by-bit into a shift register, copied into a source data input buffer, moved by the router into a source data output buffer, and finally shifted out from Conan bit-by-bit into the outgoing sub-frame. These shifting and moving operations delay the source data in the bit-stream as it passes through the node by a time equal to 4 Conan sub-frame times (approx. 45µs at  $f_s=44.1\text{kHz}$ ). Nodes which do not modify the source data in the bit-stream (i.e. which are not sources of source data, e.g. Amplifiers) can reduce this delay to only 1 bit by activating Conan's source data bypass (SBY bit in the Transceiver Control Register).

The smallest amount of source data that Conan can manipulate individually is eight bits - a 'source data byte' (Dn). There are a total of forty source data bytes as possible inputs to the Router (sixteen from the frame received from the network, and eight from each of the three source data input ports) numbered sequentially from 00H to 27H. The destinations for these input source data bytes are the forty output source data bytes (similarly numbered) of the transmit frame and the three source data output ports. The router is controlled by the Routing Information Table (RIT), which has forty entries. To route the input source data byte Dn with the index X to the output source data byte with RIT address offset Y, simply write the value X into the address offset Y of the RIT.

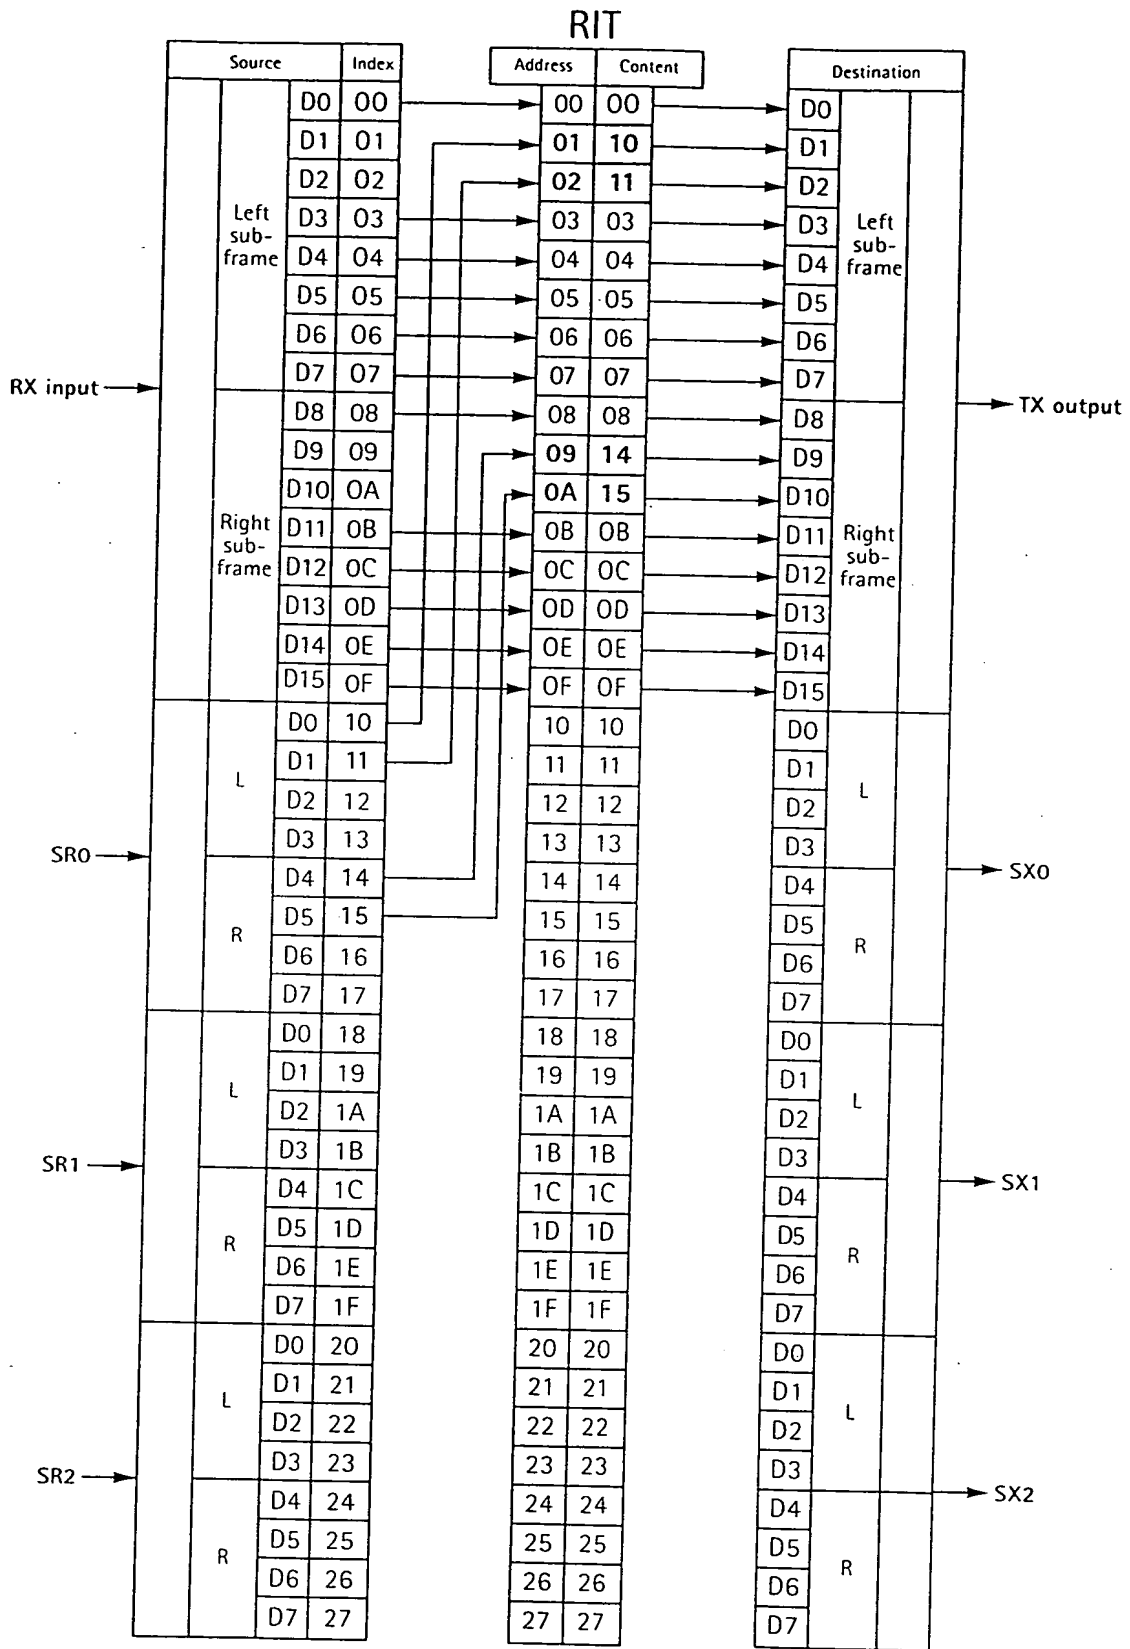


Example of Router Operation (64 clock cycles per frame)

The example above shows a 16-bit stereo channel being routed from SR0 to the outgoing Conan bit-stream. In this case, the RIT offsets 1H, 2H, 9H & AH must contain 10H, 11H, 14H & 15H respectively. All other bytes of the incoming frame are routed directly out to the outgoing frame unchanged.

Source bytes with index 0H & 7H for the left sub-frame (and 8H & FH for the right sub-frame) contain the transparent channels, control and status bits, so would normally always be routed through unchanged.

After power-up or reset, the offsets 00H to 27H contain the values 00H to 27H respectively. All source data bytes received from the network are then routed directly out to the transmitter unchanged.

The description above for the source data routing applies where there are 64 clock cycles per frame. Conan can also be configured for 48 clock cycles per frame (with the Source Data Port Control Register), and then the following diagram applies.

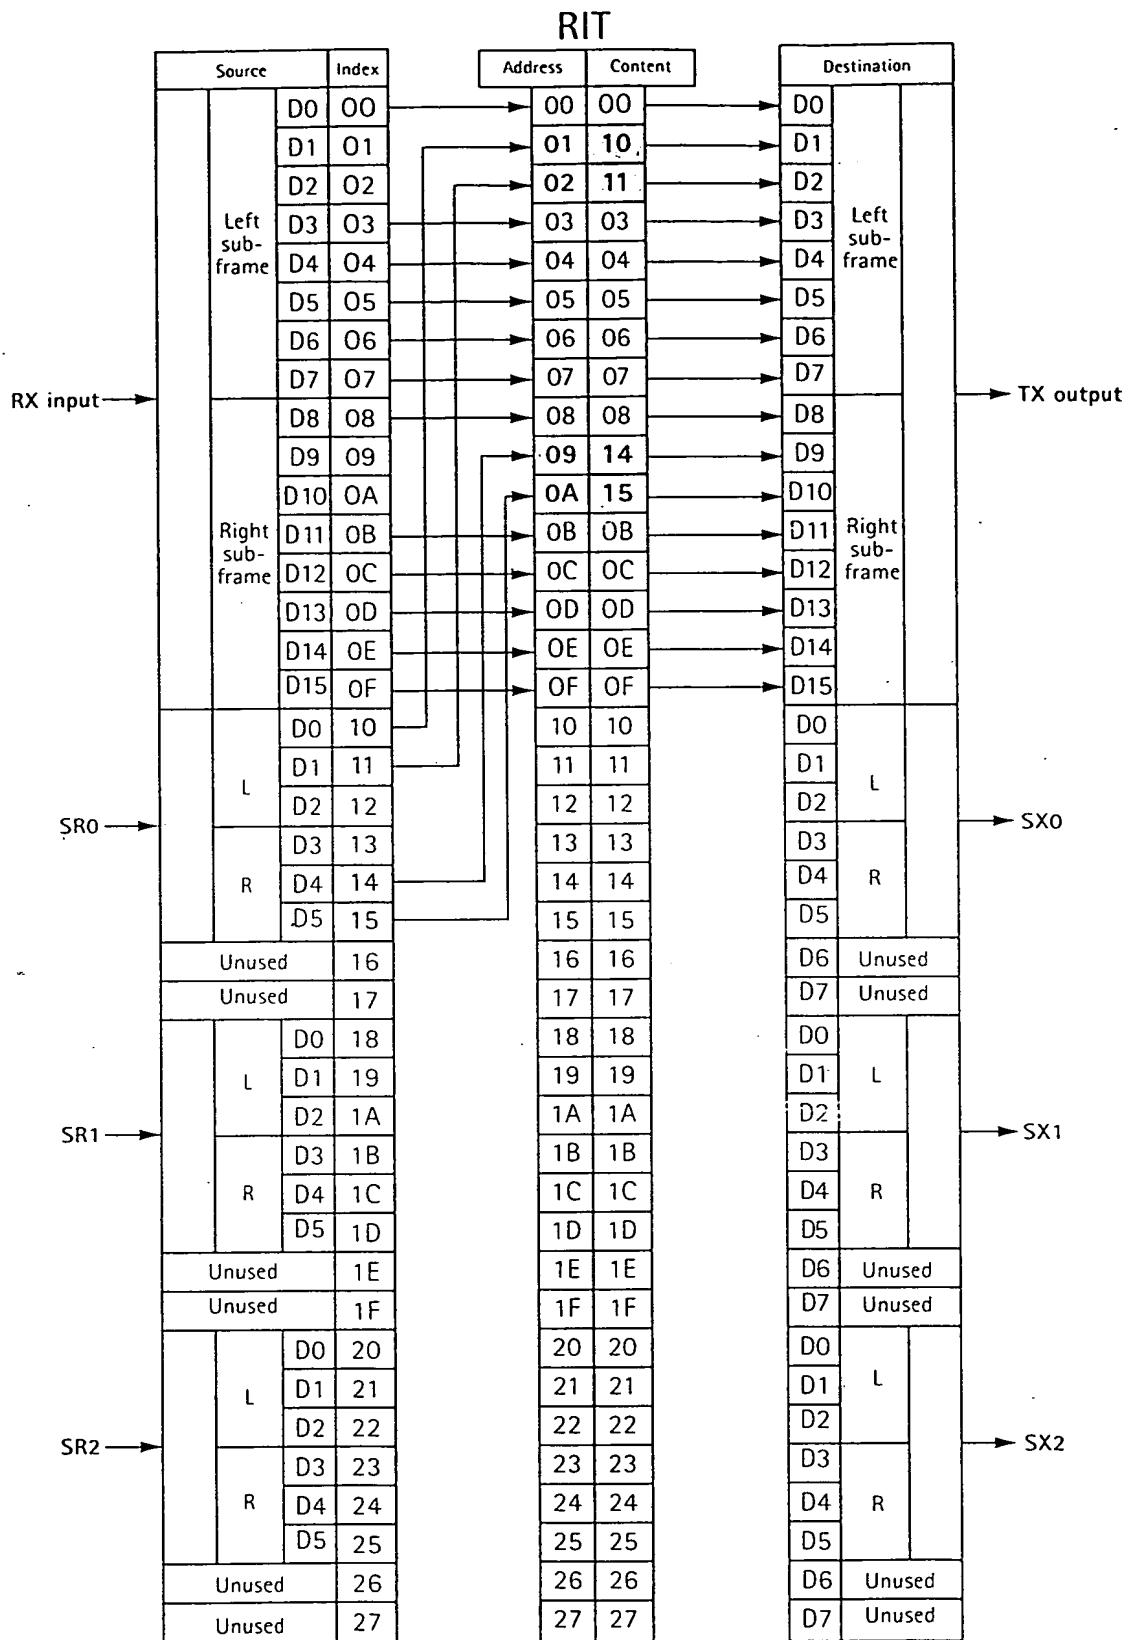

## 2.5 SPDIF Mode

Conan can support SPDIF (also known as AES/EBU or IEC-958) with its SPDIF mode. The features of this mode are:

- An SPDIF channel from a local SPDIF source may be presented to SRO.
- An SPDIF channel generated at one node may be transported transparently (without loss) on the network to all other nodes (up to 24 source data bits and the VUC bits).
- An SPDIF output is available from SX0 to present to a local SPDIF destination, even if there is no SPDIF channel being transported on the network (see 'SPDIF output from non-SPDIF data', section 2.5.3).

SPDIF mode is activated when the SPD bit in the Source Data Port Control register is set. Input SRO and output SX0 will then receive and transmit source data in SPDIF format. The other source data ports (SR1, SR2, SX1, SX2) remain available to communicate non-SPDIF data, as configured in the Source Data Port Control register.

FSY and SCK must be synchronised to the SPDIF input, so they are automatically configured as outputs to maintain synchronisation requirements. Note that FSY and SCK are common for all source data ports. When Conan is in master mode, it can recover a clock from the SPDIF input on SRO, which it can then use internally (see Clock Management section 2.7).

The SPDIF receiver on SRO checks for parity and bi-phase coding errors in the incoming SPDIF channel. If an error is detected, the validity bit ('V') is automatically set, so that an SPDIF destination could be muted. The SPDIF transmitter on SX0 generates the proper parity.

The channel status bits and transmitter block timing are controlled by Conan. The transmitter simply encodes data written to Source Data Port 0. When outputting an SPDIF channel recovered from the network, the channel status, user and validity information is contained in the data. When outputting an SPDIF channel recovered from non-SPDIF data, 'fake' channel status, user and validity bits may be read from the SPDIF Data Register.

In the SPDIF format, data is transported least-significant bit first. Conan's SPDIF ports take this into account and automatically change the order within the bytes to MSB first. However, the user has to ensure that the bytes are routed in the correct order through the RIT (see later). Both 16- and 24-bit SPDIF formats can be supported.

### 2.5.1 SPDIF Input and Transmission

If an SPDIF channel is input on SRO for transmission on the network, the RIT must be programmed so that source data bytes of the SPDIF input are routed correctly into the outgoing Conan sub-frame, and that the VUC bits are inserted into byte 7 of the sub-frame.


For example, to transmit a 16-bit SPDIF channel on the network in the first two bytes of the Conan sub-frame, the RIT offsets 1H, 2H & 7H for the left sub-frame could contain 12H, 11H & 13H respectively. Likewise for the right sub-frame, the RIT offsets 9H, AH & FH could contain 16H, 15H & 17H (see example below).





## 2.6 Control Message Transceiver

The Control Message Transceiver is able to send and receive control messages to/from other devices on the network. It has a number of registers and message buffers associated with it – the Transmit Buffer (TxBuff), Receive Buffer (RxBuff), Message Control register, Message Status register, Device Address register, Groupcast Address register and Node Position register. These are shown below.

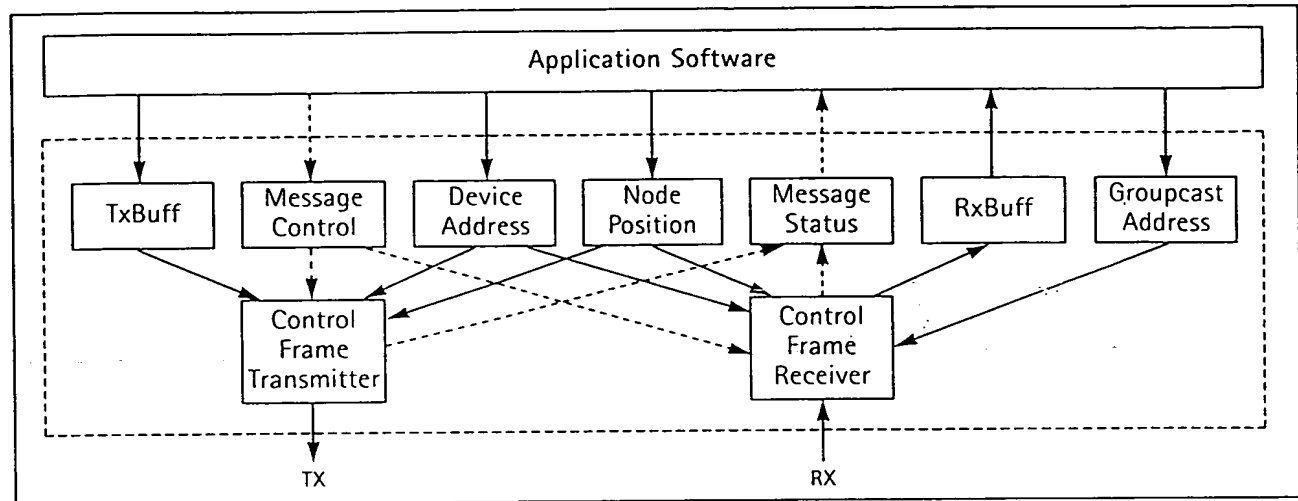

*Control Message Transceiver Block Diagram*

### 2.6.1 Address Initialisation

Following reset, Conan's device address is 'FFF'H, and it is able to send and receive messages. The device would normally then initialise its other address(es).

Each node actually has five addresses:- its 'device address', used for point-to-point messaging; its 'broadcast address' (fixed at '3C8'H) to receive broadcast messages; its 'groupcast address' to receive groupcast messages; its 'node position' to receive messages address by node position; and its 'set-position address' (fixed at 'F00'H) to receive the set-position command. These are all described in more detail later.

The device address and groupcast address must be initialised by the local application software. The node position address is initialised as part of the network start-up procedure.

#### 2.6.1.1 Initialising the Device Address

There are two ways to initialise the device address:

- Using the automatic device address initialisation and verification mechanism built-into Conan
- Initialising and verifying the device address manually

#### Automatic Device Address Initialisation And Verification Mechanism

Write the new device address as the destination address field into TxBuff then set the SAI ('Start Address Initialisation') bit in the Message Control register (see section 4.1.6). Conan will check that the given address is unique on the network (by attempting to send a message to it), and if so, will write the verified address into its Device Address register (see section 4.1.12). The application may write a message into the data field of TxBuff before setting SAI, if needed.

Once the address is tested, the MTX ('Message Transmitted') bit will be set in Message Status register (see section 4.1.7) and an interrupt may occur depending on the Int Mode (see section 4.1.9). The TXR ('Transmission Result') bit reflects the result of the test and if set means that the address is unique in the system and is now the adopted address for this device.

If TXR is not set, the address is rejected and the device address remains set to 'FFF'H. Another device address may be tried by the application. Just as for any normal transmission, the RTI ('Reset Transmission Interrupt') bit must always be set ready for the next transmission.

## Manual Device Address Initialisation And Verification

Simply write the new device address into Conan's Device Address register. This mechanism should only be used in fixed/closed systems where address conflicts cannot occur, or for software test/development purposes.

### 2.6.1.2 Initialising the Groupcast Address

To receive groupcasts, a device must write the least-significant byte of its groupcast address, value '00'H to 'FF'H (except 'C8'H) into the Groupcast Address register(see section 4.1.10).

### 2.6.1.3 Initialising the Node Position

This mechanism enables each device on the network to find out its position relative to the System Master. The System Master application software initiates the procedure by sending the following message:  
Destination Address = 'F00'H, Msg Type/Length = don't care, Data[0] = 03.


This message is passed around the network from device to device within a single control frame. Each device receives the message, stores its position in its Node Position Address register (see section 4.1.8) and passes the message on to the next device. This is all done automatically by Conan - no application software is needed in slave devices.

The procedure is complete when the message returns back to the System Master. At this moment, every device will know its position on the network, regardless of the transmission result.

## 2.6.2 Sending a Message

### 2.6.2.1 General Procedure

The general procedure to send a message is to write the message into the transmission buffer (TxBuff) and then set the STX ('Start Transmission') bit in the Message Control register. The control message transceiver reformats the message for transmission and sends the message with up to 5 retries, 10ms apart, if necessary. A gap of 10ms is also inserted between outgoing messages to prevent a node monopolising the control channel. The diagram below shows how Conan formats a message for transmission into the control frame.

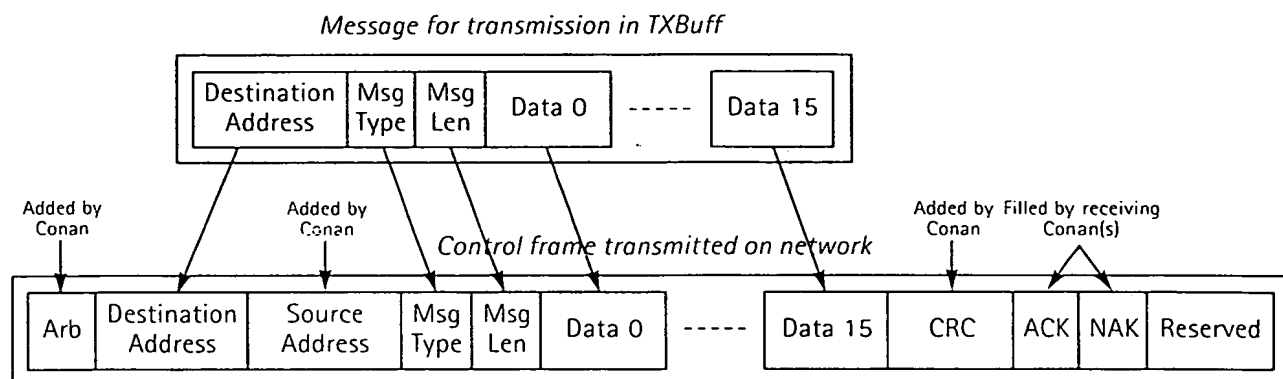

### Message Transmission

When the transmission is complete, MTX ('Message Transmitted') will be set and an interrupt may occur depending on Int Mode. TXR ('Transmission Result') is set if the transmission was successful and reset if the transmission failed. The condition must always be cleared by setting the RTI ('Reset Transmission Interrupt') bit in the Message Control register. A flow-chart for this sequence is given in section 3.2.4.

Conan can send a message in four different ways:

- point-to-point, to a device with a known address,
- broadcast, to all devices,
- groupcast, to a group of devices (e.g. all amplifiers), and
- node position addressing, to a device at a certain position on the ring

These different methods are described below.

### 2.6.2.2 Point-to-Point

To send a point-to-point message, write the device address of the destination into the destination address field of the Tx buffer, then initiate transmission as described in 'General Procedure' above.

The receiving Conan will set the ACK bit if it receives the message correctly, otherwise it will set the NAK bit. The sending Conan examines the ACK & NAK bits and generates a transmission result available in TXR.

### 2.6.2.3 Broadcasting

Broadcasting allows a message to be sent to all devices on the network. The broadcast address is '3C8'H. All nodes will receive messages broadcast to this address. This address is fixed within Conan so there is no software overhead involved in initialising the broadcast address. To send a broadcast message, write '3C8'H into the destination address field of the Tx buffer, then initiate transmission as described in 'General Procedure' above. The receiving Conan(s) will set the ACK bit if they receive the message correctly, otherwise they will set the NAK bit. The sending Conan may retry up to 5 times, 10mS apart. If a destination has already received the message (i.e. its Rx buffer already contains the message) then it will *not* set the NAK bit. The transmission result is available in TXR.

Broadcast messages have an ID byte inserted by Conan automatically at the end of their data field, which is incremented for each new broadcast message (not on each (re)transmission). The ID enables receiving Conans to determine automatically whether the message is new, or if it is a re-transmission of a message which they have successfully received already. The ID occupies data byte 15. This means only 15 data bytes (0..14) are available for message data.

If a Conan is triggered to send a message while a broadcast transmission from another Conan is in progress, it will wait until the broadcast is complete before attempting to send the message.

#### *2.6.2.4 Groupcasting*


Groupcasting allows broadcasting to a particular group of devices which have the same groupcast address only. Groupcast Addresses are in the range '300'H to '3FF'H (excluding '3C8'H for normal broadcasts). To send a groupcast message, write the groupcast address into the destination address field of the Tx buffer, then initiate transmission as described in 'General Procedure' above. The transmission result is available in TXR. Groupcasting is the same as broadcasting in all other respects.

#### *2.6.2.5 Node Position Addressing*

To send a message to a node position, write the node position address (in the range '400'H to '4FF'H, where the least-significant byte is the node position of the destination device) into the destination address field of the Tx buffer, then initiate transmission as described in 'General Procedure' above. The transmission result is available in TXR.

### 2.6.3 Receiving a Message

The diagram below illustrates how a received control frame is formatted by Conan for passing to the application.

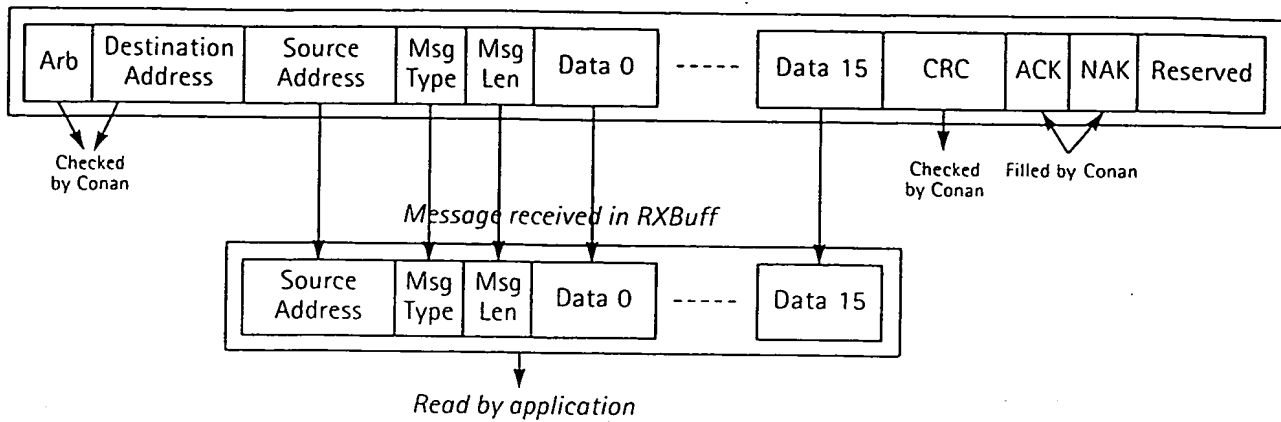

#### Message Reception

When a valid message is received, MRX is set in the Message Status register and an interrupt may occur depending on Int Mode. The condition should be cleared by writing a 1 to RRI ('Reset Receive Interrupt'). When the message has been read, the receiver buffer is re-enabled by setting RBE ('Receive Buffer Enable'). A flow-chart for this sequence is given in section 3.2.4.


## 2.7 Clock Management

Conan can be configured by software as either a Master or a Slave. Conan needs a clock source to set the timing of its transmitter and to use internally.

In Slave mode, Conan's timing is derived from the incoming bit-stream. The network receiver recovers a clock from the incoming bit-stream using a low jitter, clock multiplying, phase locked loop (PLL). The PLL will lock to incoming bit-streams with sample rates of 30 to 50kHz. On loss of lock, the PLL is pulled to its lowest frequency (to minimise EMI).

In Master mode, Conan's timing may be derived from a crystal, SCK input or an SPDIF channel applied to SRO. The Oscillator circuitry allows a crystal to be connected directly to XT1/XT0, or some other clock source to be used. The PLL multiplies-up this timing source. The RX pin is over-sampled by a fast clock and data is recovered by a digital state machine.

The Clock Manager is controlled by the Clock Manager Control register and illustrated below.

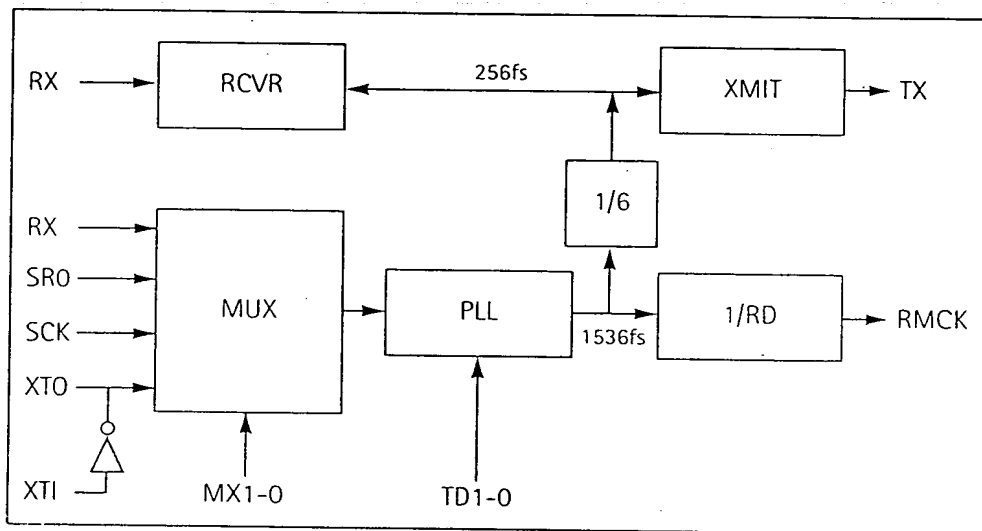

*Clock Manager Block Diagram*

The PLL is enabled automatically on power-up, but can be disabled (pulled to its lowest frequency) to reduce EMI. If no transitions are occurring on the RX pin, the PLL is automatically pulled to its lowest frequency. A programmable divider in the PLL allows the frequency of a connected crystal to be  $256f_s$ ,  $384f_s$  or  $512f_s$ . The RMCK output is a programmable clock output, offering a divided down version of the internal  $1536f_s$  clock generated by the PLL. A range of frequencies between  $64f_s$  and  $1536f_s$  are possible.

The PLL Mux selects one of four inputs for the PLL. As a slave, only the RX input may be used. As a master, there is a choice between the crystal oscillator (or other clock source applied to XT1), bit clock (from SCK input) and SPDIF data (from SRO input). If the crystal is not selected, the oscillator will be disabled to reduce EMI.

The PLL lock state is made available to applications on the ERROR pin (pin 27), the ERR bit in the Transceiver Status Register and the POR/ERR bit in the Message Status Register. The time taken for the PLL to lock after receiving valid frames (or change in sampling frequency) is typically less than 10mS. Lock is declared if three consecutive valid left preambles are found. If two consecutive left preambles are not valid, loss of lock is declared.

## 2.8 Transparent Channels


Conan can transport four channels of proprietary serial data on the network. The use of these channels is left open to System Integrators, who must define their own protocols for applications. Typical applications include the transport of raw control or status information, such as RS232-type data, VICS data, GSM data, etc.

The 4 transparent channels are transported independently in the 4 TC bits in the Conan sub-frame. Conan provides access to one of the four channels at a time (selected with the TCO-1 bits in the Transceiver Control Register) although any number of devices may monitor the same transparent channel. It is not possible for a device to send and receive on different transparent channels.

Data presented to the SER\_IN pin of Conan in one device may be transported transparently to Conan in another device and output at its SER\_OUT pin. The SER\_IN pin is sampled twice every frame (i.e. 88.2 k-samples per sec at  $f_s=44.1\text{kHz}$ ), on both FSY edges. Data is valid for reading from the SER\_OUT pin on both FSY edges.

### Asynchronous Transport

RS232-type data, up to about 19,200 baud, can be transported asynchronously with no hardware or software overhead. Conan 1 over-samples the signal on its SER\_IN pin, and inserts the bit sample into the selected TC bit in the Conan sub-frame. Conan 2 receives the sub-frame, reads the selected TC bit, and outputs it at its SER\_OUT pin. The destination (e.g. UART) should over-sample the SER\_OUT to recover the data. In both cases, the over-sampling helps to preserve the mark/space ratio of the original data.

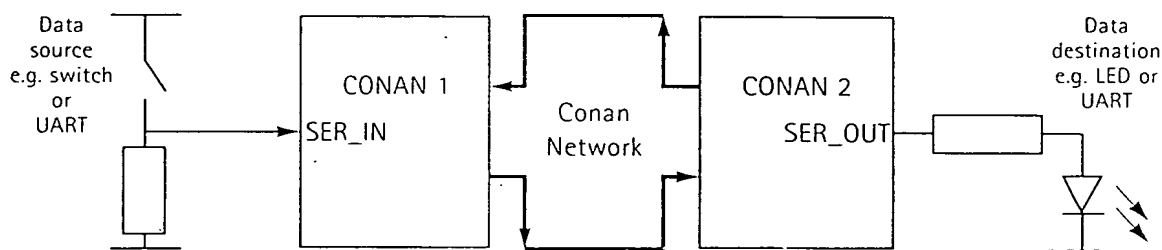

### *Asynchronous Transport*

Of course, they may be more than just the one destination Conan shown above. Any number of Conans may monitor the same transparent channel.

### Synchronous Transport

The data throughput may be increased up to a maximum of 88.2 kbps by using synchronous data, i.e. where the data is presented to the SER\_IN pin in synchronism with the clock recovered from the network, and where the sample is taken when the bit to be sampled is known to be stable. In this case, additional hardware (a data synchroniser) will be needed.

The data synchroniser must hold the data given to it from the microprocessor in a latch, and present it to SER\_IN on the FSY edge (for timing diagrams, see section 4.5.2.1).

## 4.9 Reset

Conan can be reset by hardware or software in 3 different ways:

- Power-on reset: when power is applied to Conan, it resets itself automatically.
- Hardware reset: the /RST input (pin 23) is an active-low, level-triggered TTL input. A microprocessor can reset Conan by pulling the pin low (<0.8V) for (at least) 2μS, then setting it high again.
- Software reset: by writing a 1 to the RES bit in the Message Control register

### Selection of I2C or SPI

I2C or SPI is selected during a 'hard' reset (not a software reset). I2C mode is selected by holding SCL high during the reset. SPI mode is selected by holding SCL low during the reset. The selection is completed when the reset pin goes back high. The microprocessor must wait for the POR interrupt before starting to communicate on the selected I2C or SPI.

### After Reset

Immediately following any of the above reset conditions, the ERR bit in the Transceiver Status Register is set (if the PLL has lost lock), the POR/ERR bit in the Message Status register is set to indicate power-on, an interrupt is raised which cannot be disabled (/INT goes low), and the Device Address is set to 'FFF'H. The crystal oscillator is disabled on reset (see section 4.1.5).

The POR interrupt must be cleared by setting the RPI bit in the Message Control register. This will clear the interrupt (/INT goes high) and clear the POR/ERR bit.

### Revision Code

A 1-byte revision code is provided, so that application software can distinguish between different versions of the Conan.

It can be read by a microcontroller from Data 0 (register number 0xAD) in TxBuff. It is only available for reading immediately after resetting the chip and *before* the first message is sent.

For the Conan Engineering Samples, the revision byte was 0. For the Conan Production Devices, the revision byte is 1. Future versions will have different values.



## 0 Error Handling

Conan is able to detect errors and report them to the application, including:

- bi-phase coding or parity errors in the Conan sub-frame (from the network bit-stream)
- loss of lock to the incoming bit-stream from the network
- loss of lock to an incoming SPDIF channel on SRO

Errors are signalled with the ERROR pin (pin 27), the ERR bit in the Transceiver Status Register and the POR/ERR bit in the Message Status Register (depending on Int Mode). Which of the above errors are actually reported is selected with the ME, MDL and MSL bits in the Transceiver Status Register.

The ERR and POR/ERR bits are latched. If an error condition sets them, they stay set until they are cleared. The ERR bit is cleared by writing a zero to it. The POR/ERR bit is cleared by writing a 1 to the RPI bit in the Message Control register.

The ERROR pin is not latched. The pin goes high if an error condition occurs, and remains high for as long as the error condition exists. If a bi-phase coding or parity error occurs, the ERROR pin is high for the duration of the next sub-frame. If that sub-frame has no error, ERROR will go back low.

### 2.11 Interrupt Handling

The three events which can cause an interrupt are:

- Error (highest priority)
- Message transmission completed
- Message received

The /INT output from Conan is a TTL level, active low, open drain output. When an event occurs, the /INT pin goes low, and stays low until the interrupt is cleared. The events that trigger an interrupt can be selected with the Interrupt Mode register (see section 4.1.9). The modes are:


- Interrupts disabled (except power-on reset) - must poll the registers instead
- Rx and Tx interrupts only enabled
- Rx, Tx, and Error interrupts enabled
- Error interrupt only enabled

Where the error interrupt is enabled, the error types can be masked using the bits in Transceiver Status Register (see section 4.1.2). A flow-chart is given in section 3.2.4.

Rx and Tx interrupts are queued behind an Error interrupt. If an interrupt occurs due to an error and the Rx or Tx condition becomes true before the error interrupt has been cleared, then as soon as the Error interrupt is cleared another interrupt will follow to indicate the Rx or Tx condition.

If an error occurs whilst a Tx or Rx interrupt is active, then the error flags are set (ERR in the Transceiver Status Register and POR/ERR in the Message Status Register) to inform the application. Interrupts will recur until the ERR bit is cleared.

The diagram below shows which events, when enabled or disabled by bit masks, result in which outputs.

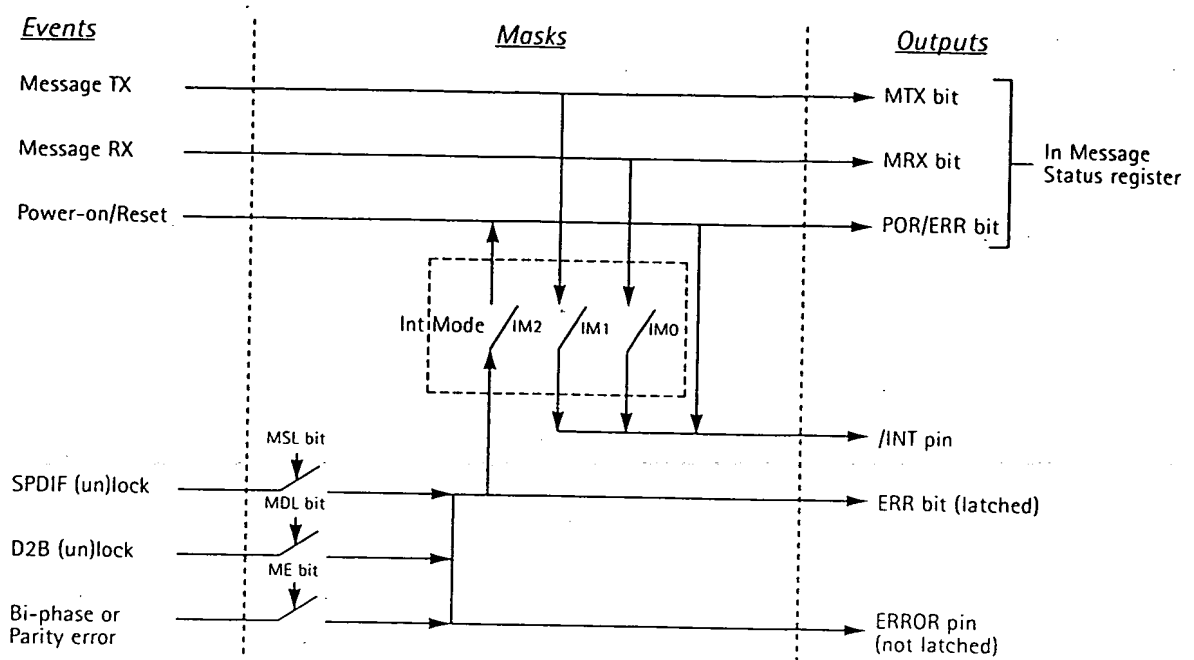

### Events, Masks and Outputs

Where the error interrupt is enabled, when clearing an interrupt caused by Rx or Tx, the microprocessor should always also clear the error interrupt by setting the RPI bit, otherwise subsequent interrupts will be blocked.

For persistent errors such as loss of lock,

- disable interrupts (either at the microprocessor, or set the Interrupt Mode Register to 00)
- poll the ERR bit in the Transceiver Status Register until lock is re-established (look for a transition from 1 to 0). After each read, clear the bit.
- re-enable interrupts

CLAIMS

1. A local communication system comprising a ring network conveying source data in both variable rate and  
5 fixed rate channels, by means of a regular frame structure in which certain portions of each frame are reserved for said fixed rate channels, whether or not said fixed rate channels are in use, and certain other portions of each frame are available for said variable  
10 rate channels, and a control mechanism is provided for allocating said variable rate portion dynamically between different channels.

2. A system according to claim 1, wherein the frame  
15 rate is synchronised with one or more digital audio data sources, for which source data is carried in the fixed rate portions of each frame.

3. A system according to claim 1 or 2, wherein each  
20 frame conveys control bits forming part of a control message frame transmitted over plural frames.

4. A local communication system comprising a synchronous ring network conveying source data in a fixed  
25 rate channel over one segment of the ring and while said fixed rate channel is multiplexed with variable rate channels over another segment of the ring.

5. A system according to claim 4, wherein said multiplexed fixed rate channels and variable rate channels comprise different respective portions within a regular frame structure on said other segment of the  
5 ring.

6. A fibre optic local communication system, for example according to any of claims 1 to 5, suitable for in-vehicle entertainment, communication and/or navigation  
10 purposes, having an overall source data capacity greater than 10 Mbps, the fibre optic channel conveying 4B5B or 8B10B encoded data.

7. A system according to any preceding claim, wherein  
15 variable data source data channels are mapped on to the network in asynchronous transfer mode packets.

8. A fibre optic local communication system, for example according to any of claims 1 to 5, suitable for  
20 in-vehicle entertainment, communication and/or navigation purposes, having an overall source data capacity greater than 10 Mbps, the source data comprising variable data rate audio and video data, carried by asynchronous transfer mode (ATM) packets.

25

9. A system according to claim 8, wherein the headers and data fields of ATM packets do not consist of 5 bytes

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of  
the original documents submitted by the applicant.

Defects in the images may include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLATED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ ORHER : \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents *will not* correct the image problems  
checked, please do not report these problems to the IFW Image  
Problem Mailbox.**